

Datasheet


Prestige Display case

Product code 192

Rev. 1 of 29/03/2018



1/5

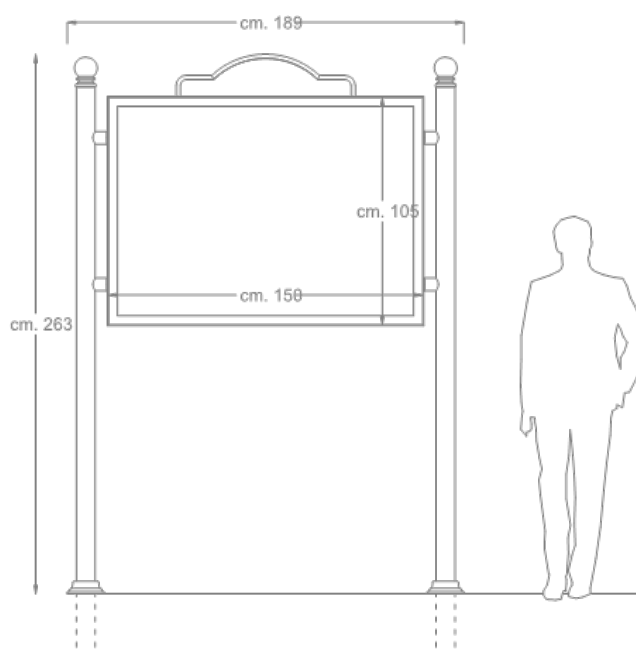

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Prestige Display case

Product code 192

Rev. 1 of 29/03/2018



DESCRIPTION

Structure

Noticeboard made of 1.5 mm thick galvanized steel box complete with drip tray in the upper part; opening front door made of galvanized steel profiles and equipped with key lock (unique encryption).

- Door infill made of 3 mm thick transparent compact polycarbonate, shatterproof, protected from UV rays and particularly suitable for outdoor use; the posting is done using magnets.
- Side uprights made of Ø 89x2 mm galvanized steel round tube, adorned in the upper part with decorative friezes; both are equipped with a decorative flange to cover the holes made for burial.
- Upper plate (removable) for the application of any name of the Municipality (adhesive not supplied).

Total weight: 69Kg

Datasheet

Prestige Display case

Product code 192

Rev. 1 of 29/03/2018



COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 192-AD -

Datasheet

Prestige Display case

Product code 192

Rev. 1 of 29/03/2018



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Prestige Display case

Product code 192

Rev. 1 of 29/03/2018



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center