


1/5

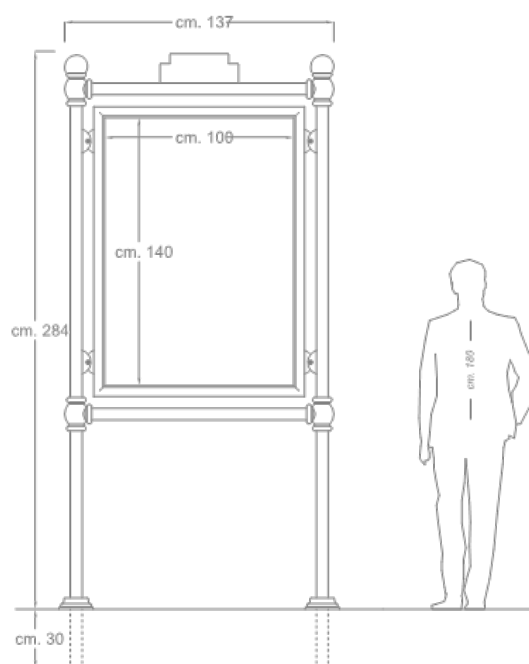

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Gotico Notice Board

Product code 196

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Double-sided Gothic billboard composed of a perimeter frame made of 1.2 mm thick galvanized steel box; a 1.2 mm thick galvanized sheet metal billboard applied inside the box profile; No. 4 connecting plates in galvanized sheet metal welded on the long sides of the perimeter frame. No. 2 support uprights in Ø 60x2 mm galvanized steel round tube adorned at the top with decorative cast iron spheres; each single upright is equipped with No. 2 connecting plates; No. 2 horizontal crosspieces in Ø 60x2 mm galvanized steel round tube. The upper crosspiece is equipped with a plate (removable) to affix the name of the Municipality, if applicable. No. 2 terminal elements in ovoid-shaped cast iron with No. 2 holes (upper corners); No. 2 intermediate elements in cast iron of ovoid shape with No. 3 holes (lower corners). No. 2 decorative flanges at the base to cover the holes made for burial.

Total weight: 72Kg

COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 196-AD -

Datasheet

Gotico Notice Board

Product code 196

Rev. 0 of 10/06/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center