
Rev. 0 of 10/06/2016







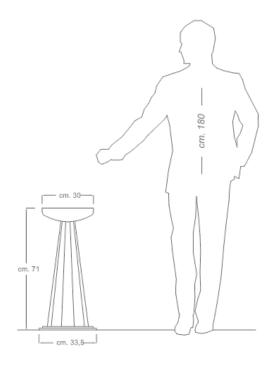

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

+39 0833 95 50 13 WWW.DIMCAR.IT

INFO@DIMCAR.IT

VIA TAURISANO 101, Z.A. 73059 UGENTO (LE) ITALY P.I. C.F. 031129830752 REA LE 200574 CAP SOC. SOC. € 2.000.000.00

Rev. 0 of 10/06/2016



DESCRIPTION

## Structure

Ashtray consisting of a truncated conical shaped shaft, made of 1.2 mm thick galvanized steel sheet with facets. Shaped upper container, made of 3 mm thick galvanized steel sheet. Base consisting of a double ring in a rectangular galvanized steel tube measuring 30x10x1.5 mm, and equipped with holes for fixing to the ground.

Overall weight: 7Kg

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Rev. 0 of 10/06/2016



## COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray (Steel parts)

Customers can request a different finish from the RAL color options available on our website.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Rev. 0 of 10/06/2016



## ANTICORROSIVE TREATMENTS AND FINISHES

#### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

#### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

#### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

## **Colored finish application**

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

#### **Polymerization colored finish**

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Rev. 0 of 10/06/2016



#### DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

**CORPORATE CERTIFICATIONS** 

ISO 9001:2015

Quality management system.

## UNI EN ISO 3834-3:2021

Welding quality management system.

## **Processing center**

Certificate of Processing Center

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.