




1/5

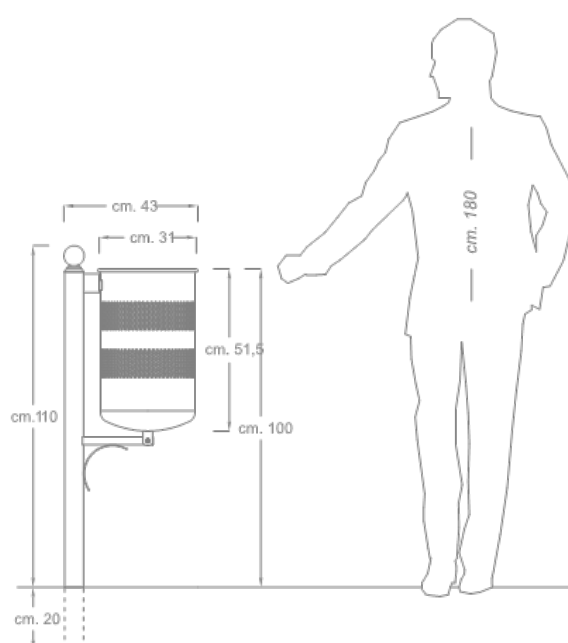

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

---

## DESCRIPTION

### Structure

The Taormina Basket is made up of a support upright in round galvanized steel tube Ø mm. 60 x 2 adorned in the upper part with a decorative frieze; the arm for supporting the basket has a decorative element in galvanized flat iron. The Basket has a cylindrical shape and is made of galvanized sheet metal with a thickness of mm. 1 with three full areas and two areas characterized by circular holes of Ø mm. 8; the upper part edged cut-resistant; and the shaped bottom is in galvanized sheet steel with a thickness of mm. 1.5 with holes for draining rainwater.

**Overall weight:** 10Kg

# Datasheet

Bin Taormina

Product code 208

Rev. 0 of 10/06/2016



---

## COLOR FINISH AS PROVIDED IN THE CATALOG



Gun metal gray  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

---

## PRODUCT OPTIONALS



Product code 431 - Ashtray Bond

---

## PRODUCT VARIANTS



Product code 208-BIS - Bin Taormina with Lid



Product code 208-BIS-P - Taormina basket with lid and ashtray

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

---

## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

### Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

### Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

### Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

### Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

### Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

---

## DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

---

## FIXING

The product must be installed by cementing.

---

## CORPORATE CERTIFICATIONS

### ISO 9001:2015

Quality Management System.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008