




1/5

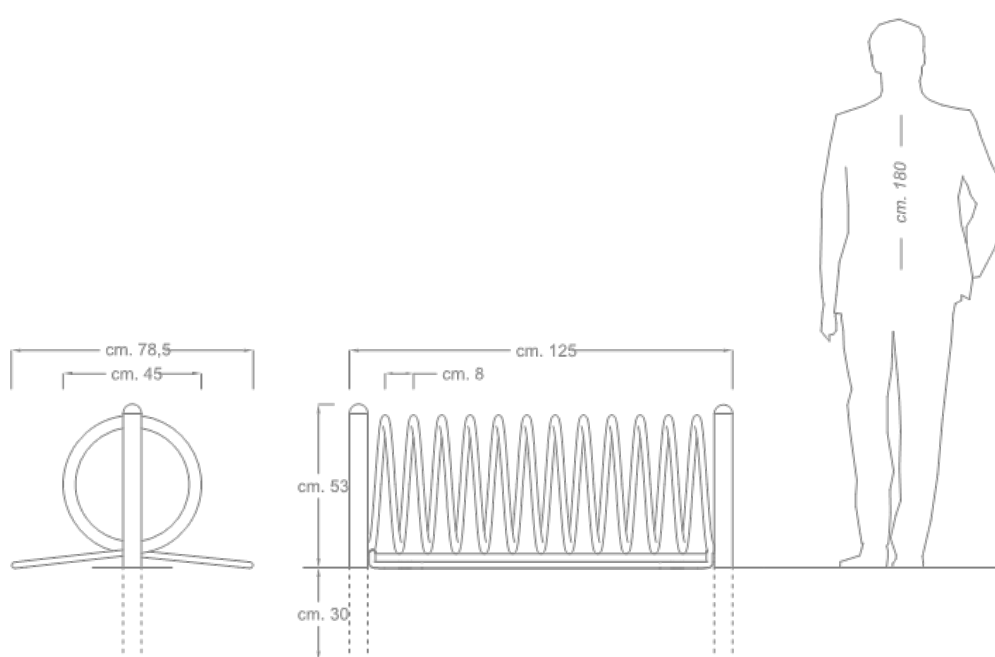

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

# Datasheet

Bicycle Stands Elix

Product code 236

Rev. 0 of 10/06/2016



## DESCRIPTION

### Structure

Elix bike rack composed of N. 2 support uprights in round galvanized steel tube Ø mm. 60x2 complete with PVC end caps with spherical heads.

- In the lower part, horizontal connecting crosspiece in round galvanized steel tube Ø mm. 25x1.5 complete with support feet.
- Helical bike-stop element made of oval section tube 40x20x1.5 mm with the possibility of parking on both sides. N. 2 "U" shaped wheel-stop elements in round galvanized steel tube Ø mm. 20x1.5.

**Total weight:** 29Kg

# Datasheet

Bicycle Stands Elix

Product code 236

Rev. 0 of 10/06/2016



---

## COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

---

## PRODUCT VARIANTS



Product code 236-D - Bicycle Stands Elix Display

---

## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

### Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

---

## DELIVERY

Product supplied already assembled with steel hardware and instructions for ground fixing.

---

## FIXING

The product must be installed by cementing.

---

## CORPORATE CERTIFICATIONS

### ISO 9001:2015

Quality management system.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate of Processing Center