




1/5

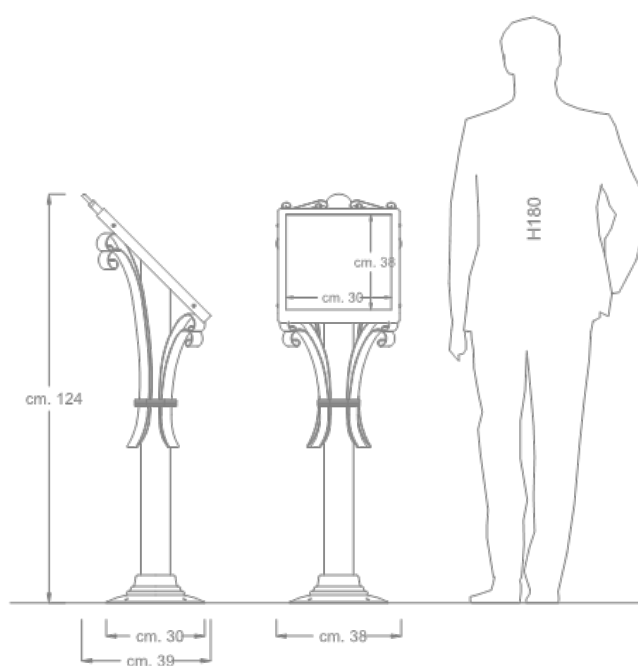

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Information Stand Barocco

Product code 254

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Support column made of round tube of galvanized steel Ø mm. 89x2; adorned in the upper part by N. 4 decorative volutes, manually shaped in galvanized flat iron mm. 40x3. The volutes are wrapped around the upright, in the central part, by a spiral in galvanized solid round Ø mm. 5. At the base decorative flange characterized by harmonious overhangs. Reading surface in galvanized sheet metal thickness mm. 2 bordered on the perimeter. An external frame in galvanized steel angular profile thickness mm. 3, adorned with decorative elements in the upper part, allows the locking of the panel in transparent compact polycarbonate thickness mm. 3.

Total weight: 16Kg

COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 254-PL -

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center