




1/5

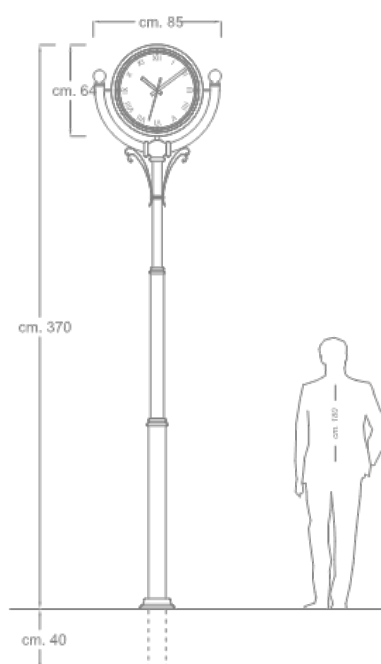

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

DESCRIPTION

Structure

Support column made of round steel tube in triple section of Ø mm. 114x3 (lower part); of Ø mm. 89x2 (intermediate part) and of Ø mm. 60x2 upper part.

- Decorative lower flange to cover the hole made for burial.
- N. 2 intermediate decorative reduction elements in turned steel; No. 2 artistic volutes in the upper part, made of galvanized plate of mm. 40x3.
- The volutes are wrapped around the support column by a spiral in galvanized solid round of Ø mm. 5.
- A "U" shaped cradle, made of galvanized steel round tube of Ø mm. 60x2 with decorative spheres at both ends and an ovoid "T" element in cast iron, guarantee the support of the clock to the rest of the structure.

"Antique" style outdoor clock with double dial (double-sided) consisting of:

- Aluminum and galvanized steel case painted with epoxy resins resistant to atmospheric agents - diameter cm. 62
- White opaline dial, hands and time scale in Roman numerals, black color

Overall weight: 60Kg

- Protective cover in shatterproof Plexiglas®.
- GPS technology with absolute precision (1 thousandth of a second/year), self-correcting sensor of the hands and automatic summer/winter time change - Power supply of the clock and LED lighting of the head at 220 VAC.

In the event of a power failure, operation is still guaranteed by an emergency battery located inside the head, which guarantees the operation of the clock only (excluding LED lighting) for a maximum period of approximately 10 days - Wired cable, with output at the base, for connection to the 220 V electrical network.

COLOR FINISH AS PROVIDED IN THE CATALOG



Gun metal gray
(Structure)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 258-BIS - Single-sided vintage clock

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008