

Datasheet


Bin Clean

Product code 326

Rev. 1 of 26/09/2016



1/5

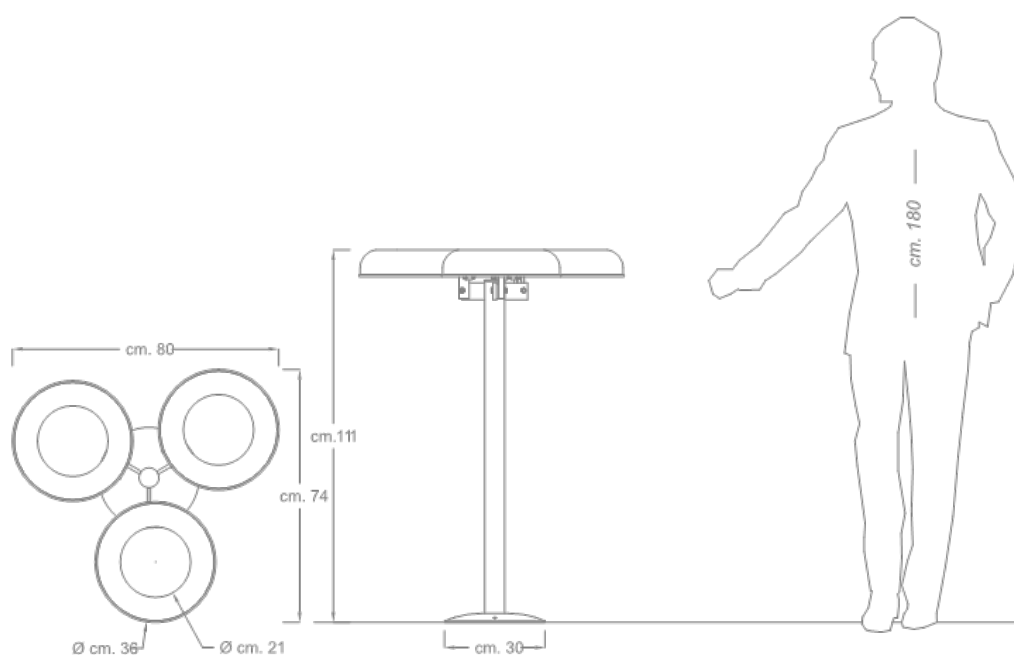

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

DESCRIPTION

Structure

Clean model anti-terrorism bin for separate waste collection, consisting of a support upright in round tubular galvanized steel Ø mm. 60x2, and complete with PVC end cap.

- Circular plate, at the base, in galvanized sheet metal thickness mm. 4; the plate is provided with holes for fixing to the ground.
- Bag-holder rings consisting of No. 03 shaped lids, of the opening type, made of galvanized sheet metal thickness mm. 1.2 with anti-cut edging and plate indicating the type of collection.
- The lids are hinged to the bag-holder ring and are provided with a hole for inserting waste.
- Fixed internal bag-holder made of galvanized steel profile.

Overall weight: 9Kg

Datasheet

Bin Clean

Product code 326

Rev. 1 of 26/09/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(Support plate)



RAL 1018
("Plastic" collection ring)



RAL 9016
("Paper" collection ring)



RAL 5017
("Aluminum" collection ring)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 326-M - Bin Clean with wall fixing

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center