




1/5

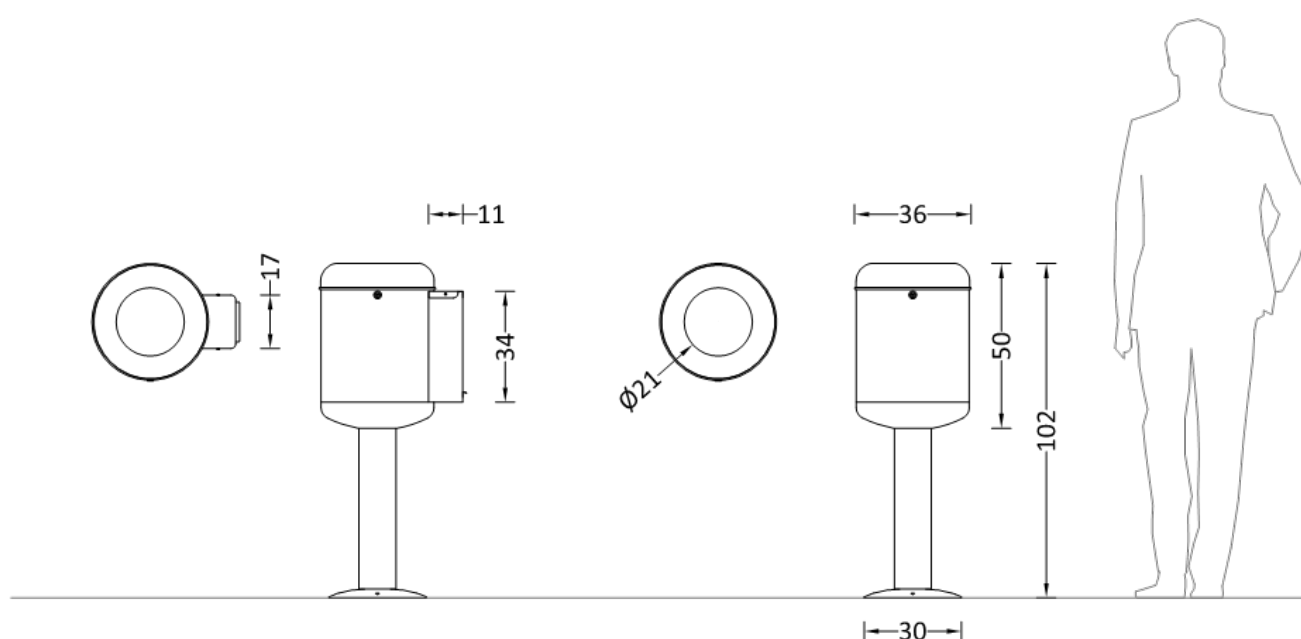

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

DESCRIPTION

Structure

Container for urban use for the collection of dog waste. Consisting of a single block divided into: support upright made of round galvanized steel tube Ø mm. 114x3, complete with circular plate at the base, in galvanized sheet metal, thickness mm. 3; the plate is provided with holes for fixing to the ground. Cylindrical barrel, made of galvanized sheet metal, thickness mm. 1.5.

- The barrel is made up, in the lower part, of a shaped bottom in galvanized sheet metal, thickness mm. 3, and of a lid, in the upper part, in galvanized sheet metal, thickness mm. 1.2; a hinge connects the lid to the barrel, while a universal key lock allows the lid to be opened and the internal container/bag to be removed.
- The introduction of waste is guaranteed by a small door, in the upper part, complete with a tab to facilitate opening; internal container in PVC designed to house a bag for the collection of dog waste.

Overall weight: 15Kg

COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 6029
(Door)



RAL 1018
(Basket)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 347-D - Optional dispenser for Fido Container

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center