

Datasheet


Vista Display case

Product code 366

Rev. 1 of 20/11/2018



1/5

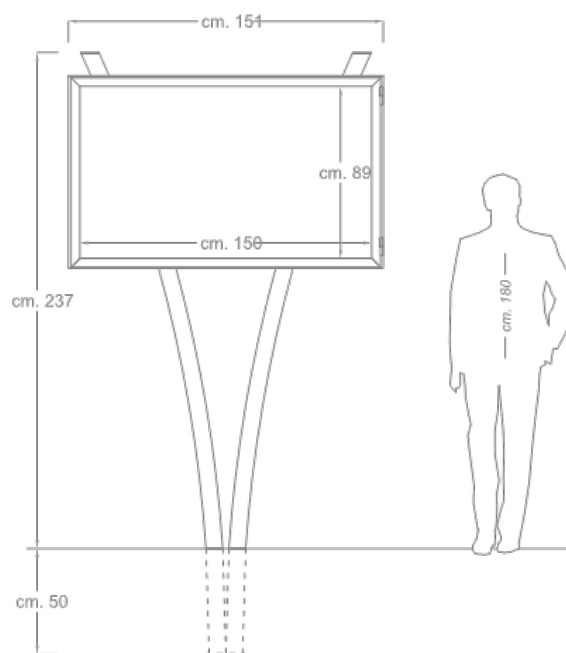

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Vista Display case

Product code 366

Rev. 1 of 20/11/2018



DESCRIPTION

Structure

Noticeboard made of 1.5 mm thick galvanized steel box, complete with drip tray in the upper part. Opening front door made of galvanized steel profiles and equipped with a single key lock; reading facade made of 3 mm thick transparent compact polycarbonate, shatterproof, protected from UV rays and particularly suitable for outdoor use; affixed using magnets. Support upright made of 2 80x40x3 mm galvanized steel rectangular tube profiles, with an arched shape, positioned in opposition to form a stylised "V".

- The rectangular profiles are connected and made integral with each other by means of square section tubular crosspieces (upper part), and by a 8 mm thick galvanized steel plate (lower base).
- The arches are closed in the upper part by galvanized steel caps.

Total weight: 77Kg

Datasheet

Vista Display case

Product code 366

Rev. 1 of 20/11/2018



COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Datasheet

Vista Display case

Product code 366

Rev. 1 of 20/11/2018



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center