




1/5

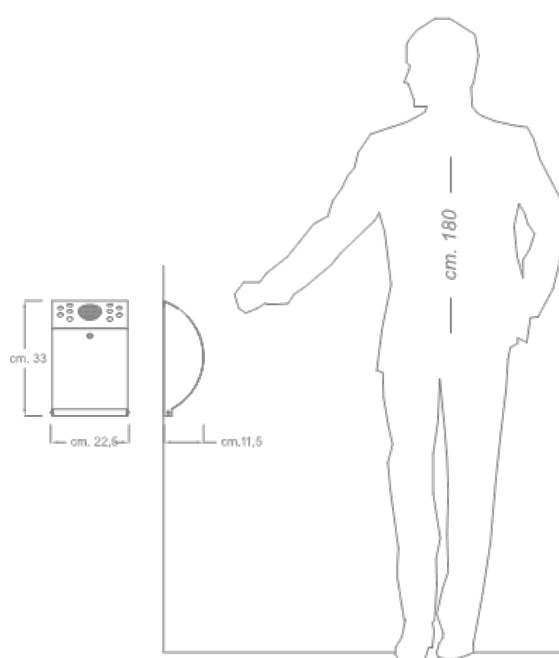

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

DESCRIPTION

Structure

Smokers ashtray made of a box made of 1 mm thick galvanized sheet metal, designed for wall mounting using holes located on the rear face. Upper front panel, made of 1 mm thick galvanized sheet metal with a Ø 70 mm central hole equipped with a micro-perforated internal sheet metal for extinguishing cigarette butts; and 14 mm Ø circular holes positioned in a checkerboard pattern on the sides to allow the insertion of extinguished cigarette butts. Internal container in 1 mm thick galvanized sheet metal with a shaped front panel that gives the entire structure a soft and modern line. In order to allow the extraction of cigarette butts by falling without ever coming into direct contact with them; the container is hinged to the structure and is equipped with a single key lock.

- Circular pictogram indicating "ASHTRAY" located on the front of the container.

Overall weight: 3Kg

COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(External shell)



Brilliant aluminum
(Inner container)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 374 - Ashtray Fumy

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied already assembled with steel hardware and instructions for ground fixing.

FIXING

The product is prepared for wall mounting using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center