




1/5

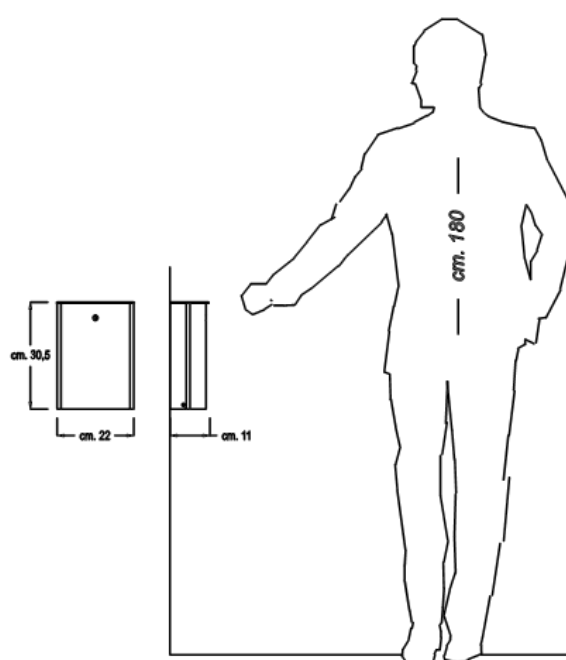

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

DESCRIPTION

Structure

The design of fumy ashtrays is based on a box made of galvanized sheet thickness of 1.2 mm that can be mounted on walls using holes on the back facade. The top plate, which is crafted from galvanized sheet thickness mm. 3, is created by laser cutting and has trapezoidal carving with micro-perforated sheet, as well as a stylized emptying for quenching and inserting the dead butt. Made of galvanized sheet thickness mm 1.2, the internal container has anti-cutting side edging. To prevent direct contact when removing the butt, the container is hinged to the structure and has a single-key lock.

- The container's front is marked with a circular Pictogram that indicates "ASHTRAY".

Overall weight: 3Kg

COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(Top plate and vertical bands)



Brilliant aluminum
(Basket)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code 373 - Ashtray Smokers](#)

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied already assembled with steel hardware and instructions for ground fixing.

FIXING

The product is prepared for wall mounting using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center