




1/5

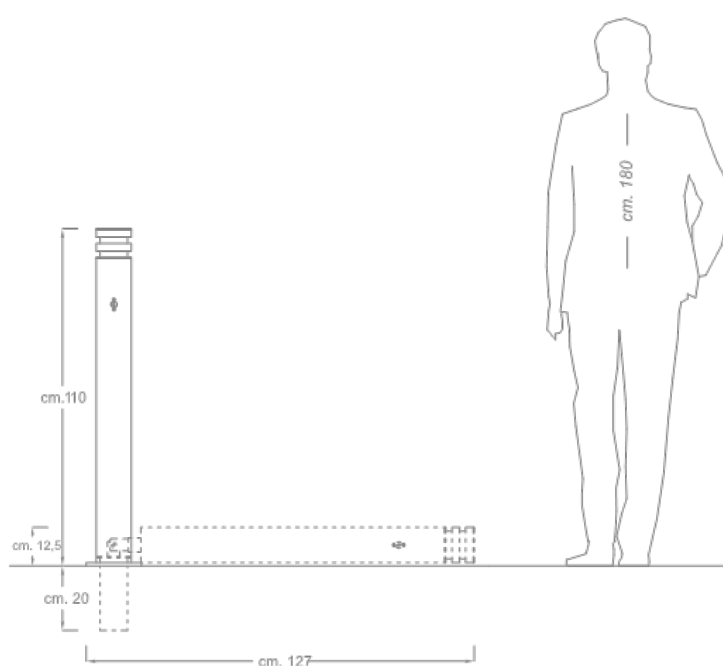

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

---

## DESCRIPTION

### Structure

The Roller bollard is made of round galvanized steel tube Ø mm. 114x3, characterized by decorative horizontal slots in the upper part. Single-key lock to allow the bollard to be unlocked and tilted at floor level. System for unlocking and lowering the bollard to the ground, consisting of a hinge in iron profiles that connect the bollard to the base plate through a special pin.

- Circular-shaped plate at the base, in galvanized sheet metal equipped with a special extension for anchoring to the ground.

**Total weight:** 17Kg

---

COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

---

## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

### Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

---

**DELIVERY**

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

---

**FIXING**

The product must be installed by cementing.

---

**CORPORATE CERTIFICATIONS**

**ISO 9001:2015**

Quality management system.

**UNI EN ISO 3834-3:2021**

Welding quality management system.

**Processing center**

Certificate of Processing Center