

Datasheet


Large trash bin Clean maxi

Product code 433

Rev. 0 of 16/09/2016



1/5

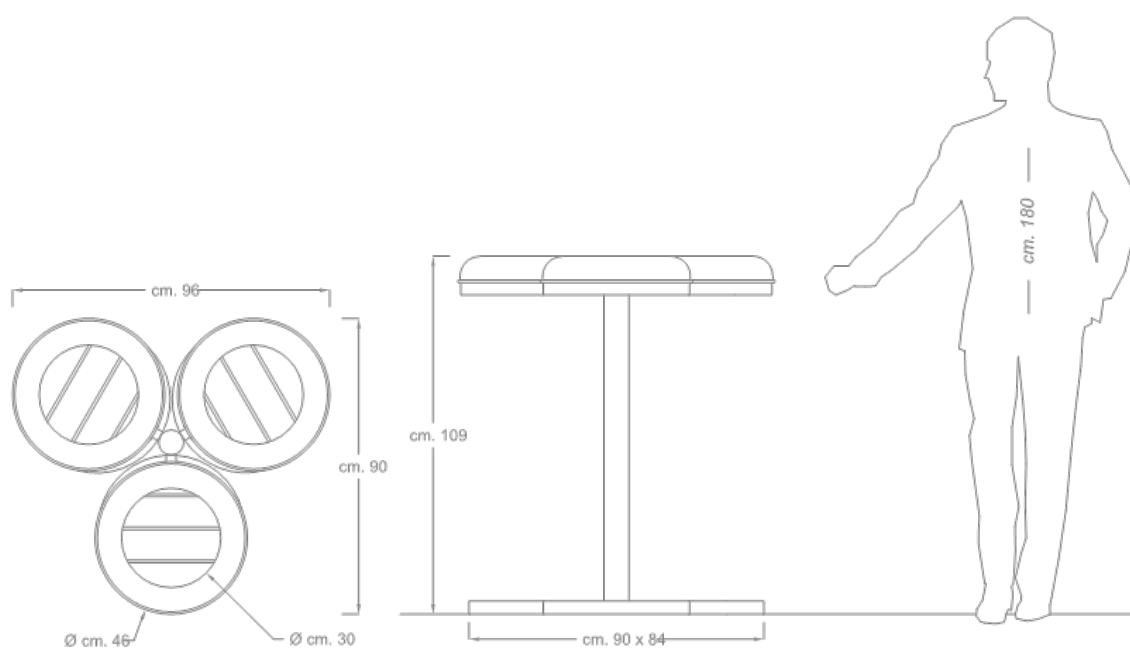

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Large trash bin Clean maxi

Product code 433

Rev. 0 of 16/09/2016



DESCRIPTION

Structure

Clean Maxi model anti-terrorism litter bin, for separate waste collection, consisting of a support upright in galvanized round tube Ø mm. 76x2 and complete with PVC end cap. Base consisting of N. 3 rings made of galvanized tube with rectangular section mm. 40x20x1.5; and complete with galvanized solid round grid and stiffening gussets. Bag-holding rings consisting of N. 3 shaped lids, of the opening type, made of galvanized sheet metal thickness mm. 1.2 with anti-cut edging; plate indicating the type of collection.

- The lids are hinged to the bag-holding ring and are equipped with a hole for inserting waste.
- Fixed internal bag-holder made of galvanized steel profile.

Overall weight: 23Kg

Datasheet


Large trash bin Clean maxi

Product code 433

Rev. 0 of 16/09/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



Iron gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 326 - Bin Clean



Product code 326-M - Bin Clean with wall fixing

Datasheet

Large trash bin Clean maxi

Product code 433

Rev. 0 of 16/09/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Large trash bin Clean maxi

Product code 433

Rev. 0 of 16/09/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center