




1/5

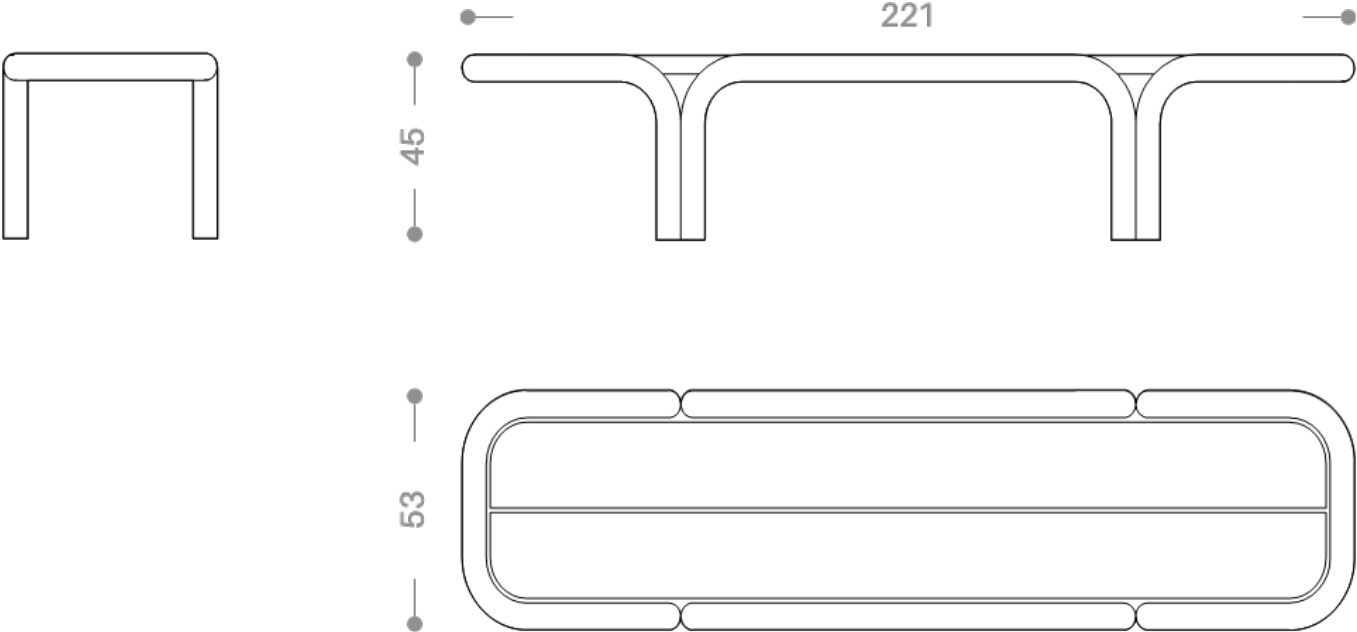

# Datasheet

Hello seat with Okumè wood planks

Product code 603-OK

Rev. 0 of 04/07/2024



## DESCRIPTION

### Structure

Hello! Hello! is the first thing we say when we meet someone. Using it with anyone and not just with friends or colleagues is the simplest form of greeting; yet, the most meaningful, it transmits welcome, friendship and enthusiasm even among strangers. The Hello bench was born with the intent of creating a product that is equally simple, versatile and at the same time communicative. Soft lines and a generous seat define a design that is as elegant and welcoming as it is easy-going, suitable for both outdoor public spaces and indoor environments.

Structure made entirely of round profile of galvanized steel Ø 60x2 mm.

Seat composed of two shaped slats in Okumè wood, section mm. 190x40.

The same article can be requested with slats in Nordic Pine.

**Total weight:** 26Kg

# Datasheet

Hello seat with Okumè wood planks

Product code 603-OK

Rev. 0 of 04/07/2024



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 7032  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

# Datasheet

Hello seat with Okumè wood planks

Product code 603-OK

Rev. 0 of 04/07/2024



## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

### Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

## MAINTENANCE PLAN FOR WOODEN PARTS

For a long service life of wood planks, periodic maintenance work is necessary, therefore, maintenance is recommended **every three to six months and in any case once a year.**

For periodic maintenance, carry out light sanding with a 150-grit abrasive sponge, apply a thin coat of Adler Oil, absolutely avoiding the formation of layers.

For the renewal of aged and graying elements, proceed with a thorough sanding with a 150-grit abrasive sponge in the direction of the fibers, removing any existing paint residue.

Proceed with an initial application of Adler Light Mahogany Oil by brush. After 12 hours, apply a second coat of Olio Adler light mahogany with a brush and then pull off excess product with a soft cloth.

Please note, necessary maintenance products such as Oils and impregnants are not included in the product supply but can be requested separately.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.



DELIVERY

Product supplied already assembled with steel hardware and instructions for ground fixing.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center