
Rev. 1 of 04/08/2023







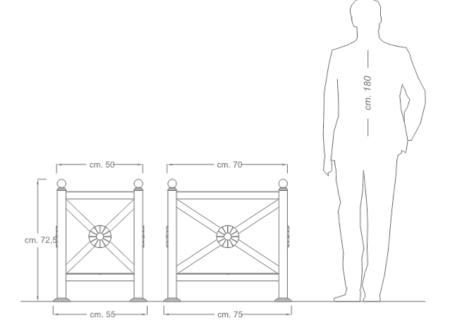

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

+39 0833 95 50 13 WWW.DIMCAR.IT

INFO@DIMCAR.IT

VIA TAURISANO 101, Z.A. 73059 UGENTO (LE) ITALY P.I. C.F. 031129830752 REA LE 200574 CAP SOC. SOC. € 2.000.000.00

Rev. 1 of 04/08/2023



DESCRIPTION

## Structure

Rectangular in shape, composed of 4 columns in galvanized steel square tube mm. 50x50x1.5, with a decorative element at the top; each individual column is equipped with a plate at the base in galvanized steel. Connecting crosspieces and internal crosspieces in galvanized steel square tube mm. 40x40x1.5; the crosspieces are adorned on the outside with a central decorative element. Internal tank made of galvanized sheet metal.

Overall weight: 27Kg

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Rev. 1 of 04/08/2023



# COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 7001 (Inner tank)



Gunmetal gray (External shell)

Customers can request a different finish from the RAL color options available on our website.

**PRODUCT VARIANTS** 



Product code 954 - Rectangular Flower box Orchidea Maxi

3/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Rev. 1 of 04/08/2023



# ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

#### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

#### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

## Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

## **Colored finish application**

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

#### **Polymerization colored finish**

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Rev. 1 of 04/08/2023



#### DELIVERY

FIXING

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

The product does not require anchoring to the ground.

**CORPORATE CERTIFICATIONS** 

ISO 9001:2015

Quality management system.

# UNI EN ISO 3834-3:2021

Welding quality management system.

### **Processing center**

Certificate of Processing Center

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.