


Datasheet

Komete bike stand
Product code D824

Rev. 0 of 13/06/2024



1/5

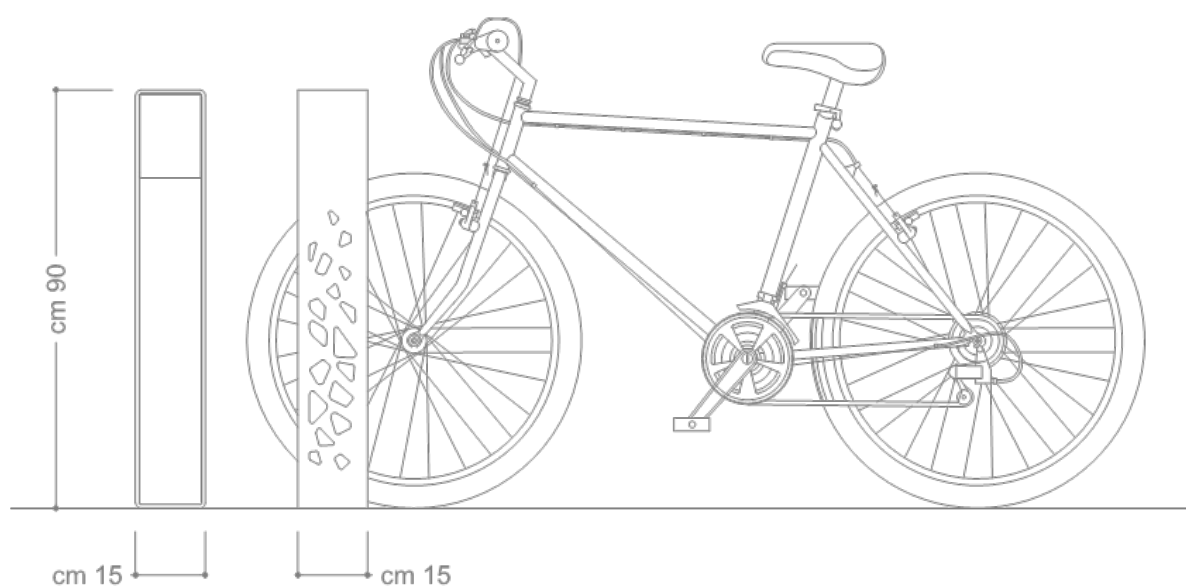

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Komete bike stand
Product code D824

Rev. 0 of 13/06/2024



DESCRIPTION

Structure

Consisting of a vertical support with rounded edges, made of galvanized sheet metal section mm. 150x8, with lateral faces characterized by stylised decorative carvings obtained by laser cutting. Support provided at the base with holes for fixing to the ground.

Upper decorative element consisting of a trapezoidal box made of galvanized sheet metal. The support allows you to secure the bikes by inserting the wheel inside it or by placing it sideways.

Total weight: 14Kg

Datasheet

Komete bike stand
Product code D824

Rev. 0 of 13/06/2024



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 2000
(Decoration)



RAL 9010
(Support)

Customers can request a different finish from the RAL color options available on our website.

Datasheet

Komete bike stand
Product code D824

Rev. 0 of 13/06/2024



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Komete bike stand
Product code D824

Rev. 0 of 13/06/2024



DELIVERY

The product comes with steel screws and fixing instructions.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008