


1/5

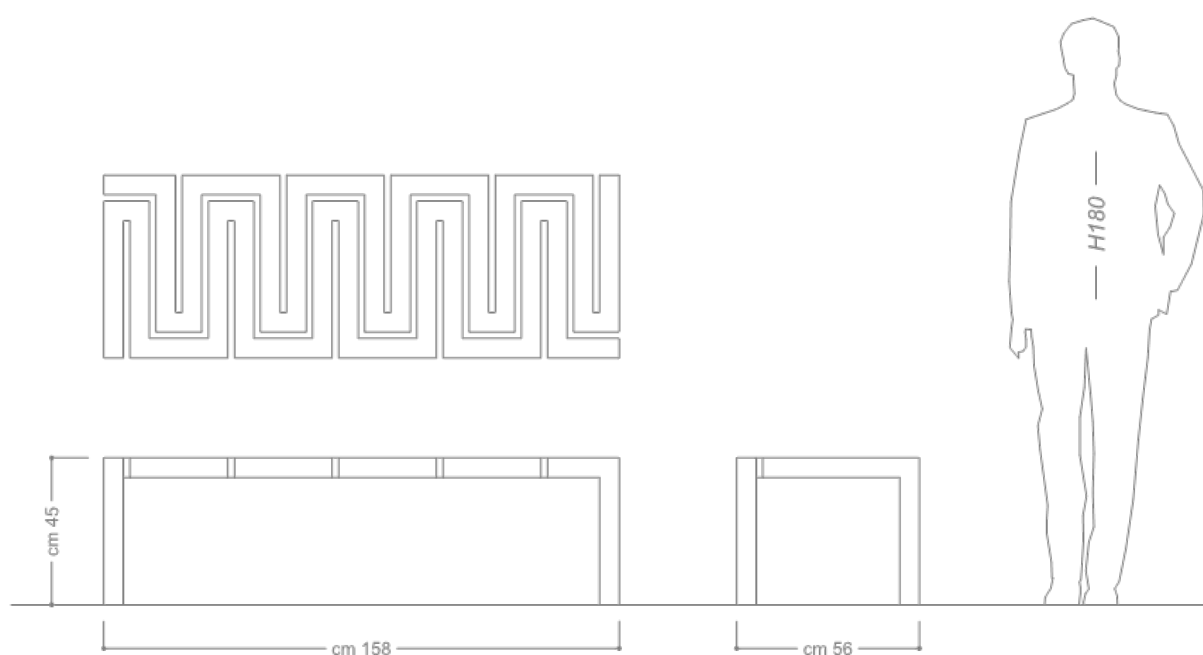

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

DESCRIPTION

Structure

What distinguishes the Snake bench is the sinuosity of its shape, characteristic of the snake; The entire structure is made of tubular profiles of galvanized steel with a square section and consists of 2 interconnected monoblocks, each comprising two feet; each single foot is equipped with a base plate in galvanized sheet metal with a hole for fixing to the ground.

- All the edges of the structure are free of sharp edges, The openings do not cause the risk of trapping fingers.

Overall weight: 62Kg

Datasheet

Snake seat

Product code D830

Rev. 0 of 31/08/2022



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1015
(Steel parts)



RAL 8012
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code D830-BIS - Snake bench](#)

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center