


# Datasheet

YouAndMe fountain  
Product code D859

Rev. 0 of 29/10/2020



1/5

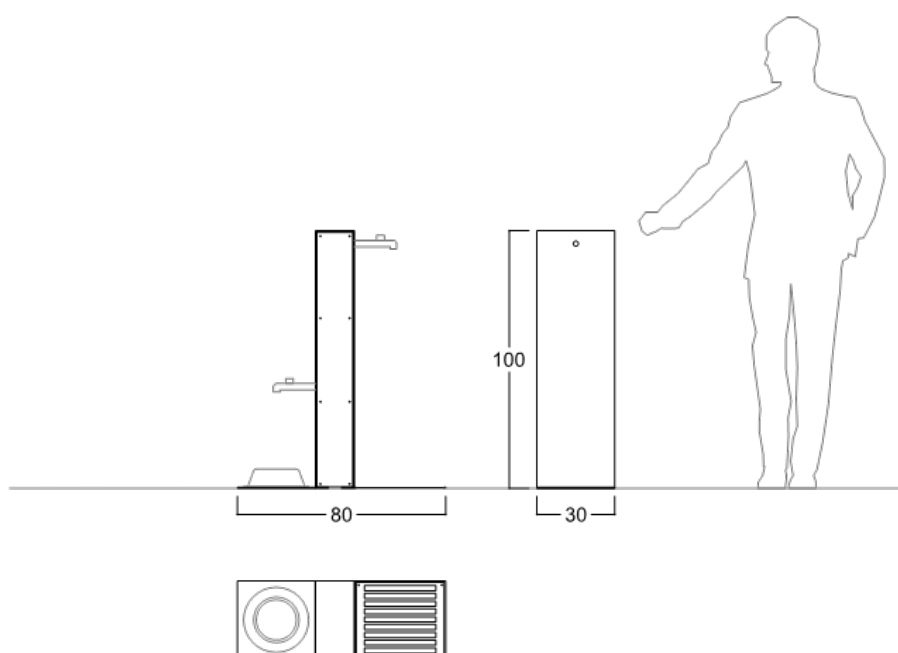

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

# Datasheet

YouAndMe fountain

Product code D859

Rev. 0 of 29/10/2020



---

## DESCRIPTION

### Structure

Made up of a central body made of 4 mm thick galvanized sheet metal and lateral paneling made of 2 mm thick galvanized steel sheet metal. Front platform (man side) with base grid made of galvanized sheet metal and equipped with a special frame for fixing to the ground. Rear base (dog side) made up of a galvanized sheet metal plate with holes for fixing to the ground and a stainless steel bowl (included) equipped with a fixing system to prevent any theft, with a screw system for removal and/or replacement. Taps included (the fountain is supplied with the provision for lateral opening by unscrewing the panel for the water system to be carried out by the Customer).

**Total weight:** 33Kg

# Datasheet

YouAndMe fountain

Product code D859

Rev. 0 of 29/10/2020



---

## COLOR FINISH AS PROVIDED IN THE CATALOG



Brilliant aluminum  
( Bowl plate )



RAL 3020  
( Fountain body )



Gun metal gray  
( Side panels and front grille )

Customers can request a different finish from the RAL color options available on our website.

---

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

# Datasheet

YouAndMe fountain

Product code D859

Rev. 0 of 29/10/2020



## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

### Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

### Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

### Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

### Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

### Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

---

## DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

---

## FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

---

## CORPORATE CERTIFICATIONS

### ISO 9001:2015

Quality Management System.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008