


1/5

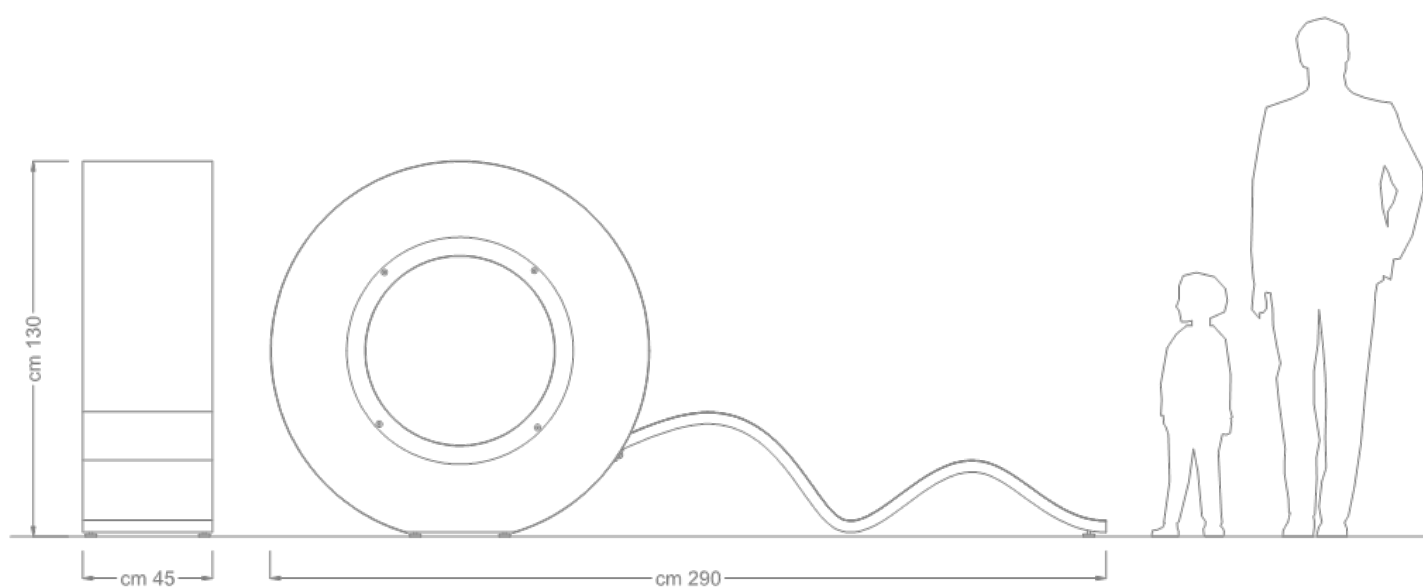

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Librichina

Product code D873

Rev. 0 of 10/07/2023



DESCRIPTION

Structure

Nastrina model seat, a new form of furniture with an unmistakable style, designed for use by children. Playful lines and bright colors, all child-friendly. The seat consists of a main block of circular shape, with the characteristic shape of "adhesive tape", made entirely of 3 mm thick galvanized sheet metal. Characterized by a central hole and a support base designed for anchoring to the ground. Shaped seat with a "wave" effect made with laser-cut shapes and galvanized sheet metal covering paneling.

The shape of the seat allows for use on multiple height levels.

Overall weight: 118Kg

Datasheet

Librichina

Product code D873

Rev. 0 of 10/07/2023



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 9010
(Inner seating)



RAL 1018
(Tape)

Customers can request a different finish from the RAL color options available on our website.

Datasheet

Librichina

Product code D873

Rev. 0 of 10/07/2023



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied already assembled with steel hardware and instructions for ground fixing.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center