


# Datasheet


Plomb

Product code D879

Rev. 0 of 24/03/2023

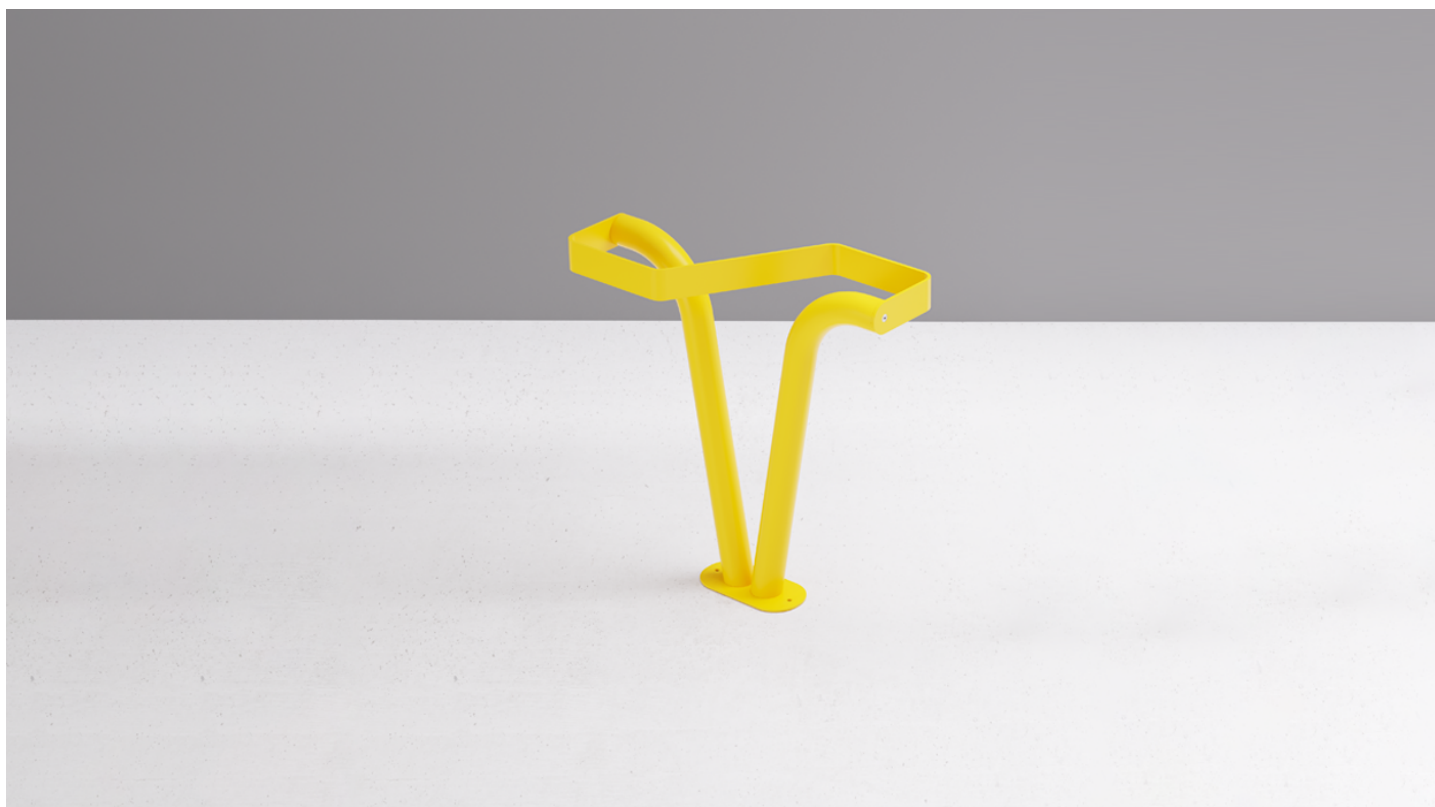

1/5

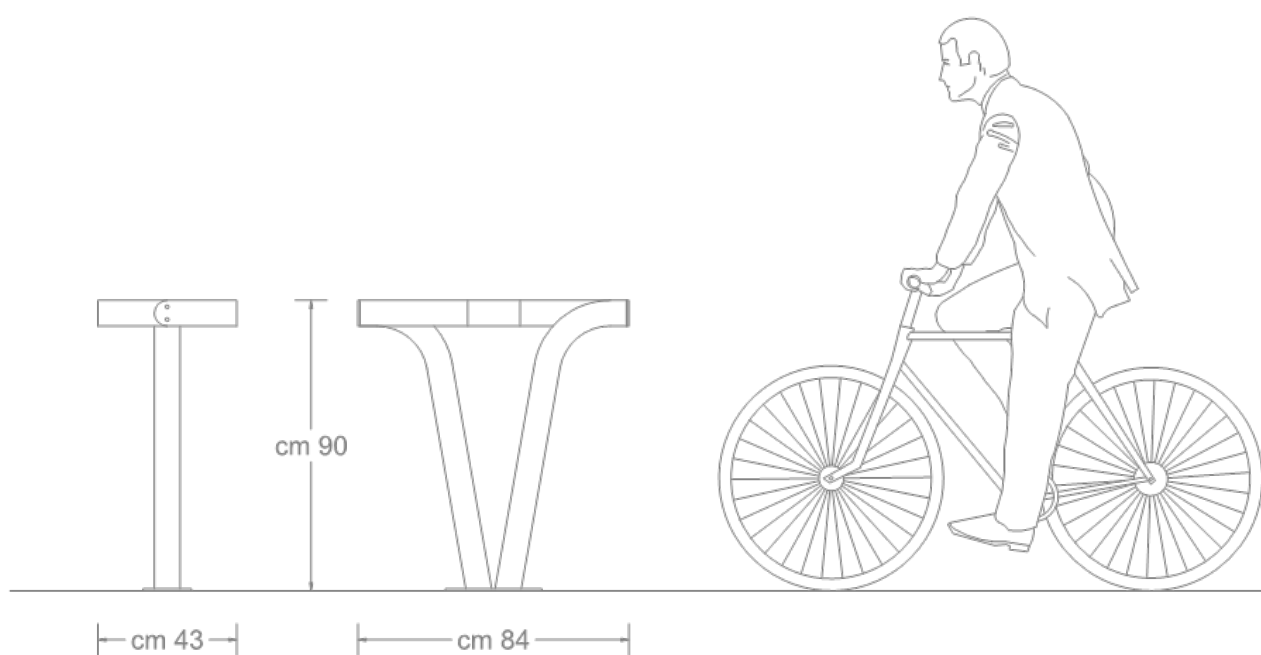

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

# Datasheet

Plomb

Product code D879

Rev. 0 of 24/03/2023



---

## DESCRIPTION

### Structure

With its particular shape, the Plomb bike rack is made up of two shaped profiles, made of round galvanized steel tube Ø mm 60x2; the profiles are made integral with the base by a shaped plate, made of galvanized sheet metal thickness mm. 6 with laser cutting, and provided with holes for fixing to the ground.

- Shaped upper bracket, made of galvanized profile mm. 80x6, fixed to the round profiles with bolts.
- The shaped support is designed to be used on both sides, securing the bicycle to the support by means of a padlock.

**Total weight:** 18Kg

# Datasheet

Plomb

Product code D879

Rev. 0 of 24/03/2023



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1003  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

# Datasheet

Plomb

Product code D879

Rev. 0 of 24/03/2023



---

## ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

### Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

### Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

---

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

# Datasheet

Plomb

Product code D879

Rev. 0 of 24/03/2023



---

## DELIVERY

Product supplied already assembled with steel hardware and instructions for ground fixing.

---

## FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

---

## CORPORATE CERTIFICATIONS

### ISO 9001:2015

Quality management system.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate of Processing Center