




1/5

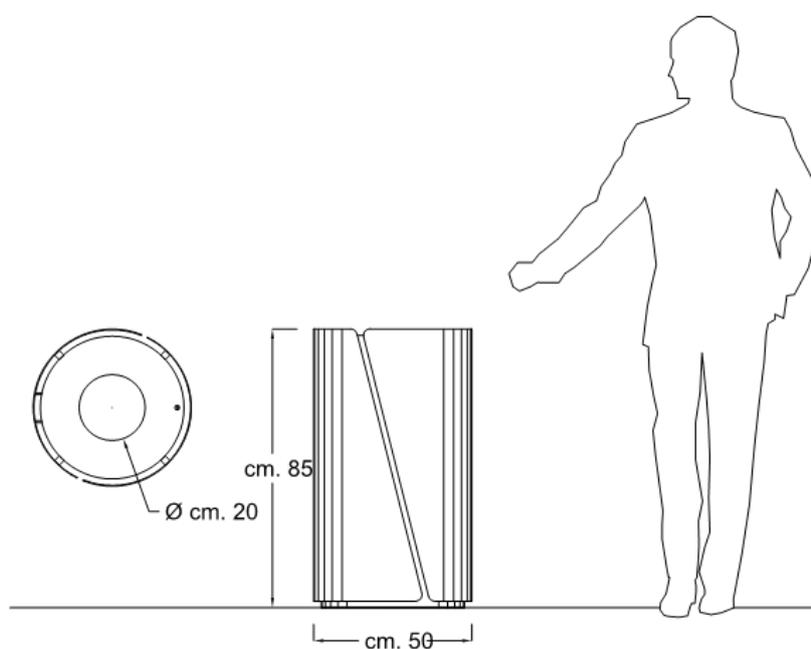

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Bon large trash bin
Product code G514

Rev. 0 of 08/02/2023



DESCRIPTION

Structure

With a particular cylindrical shape, consisting of an internal shaft made of 2 mm thick galvanized sheet metal and equipped with holes at the base for the drainage of rainwater. Circular upper ring made of 3 mm thick galvanized sheet metal obtained by laser cutting, complete with circular hole for the introduction of waste.

- External panels with a particular shape, made of 2 mm thick galvanized sheet metal, and characterized by an oblique notch that extends along the entire bin.

Overall weight: 44Kg

COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 9010
(Panels)



RAL 7005
(Inner stem)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code G514-BIS - Bob outdoor waste bin with lid](#)



[Product code G515 - Bob large trash bin with ashtray](#)



[Product code G515-BIS - Bob large trash bin with lid and ashtray](#)

Datasheet

Bon large trash bin
Product code G514

Rev. 0 of 08/02/2023



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Bon large trash bin
Product code G514

Rev. 0 of 08/02/2023



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008