




1/5

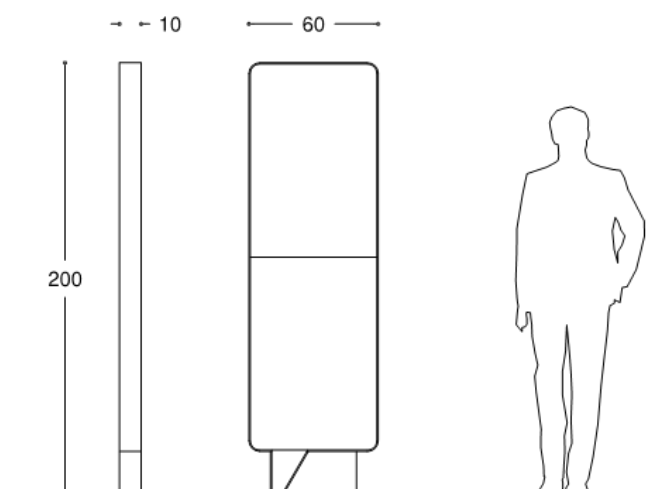

DESCRIPTION

Structure

With a particular shape, consisting of a perimeter frame in galvanized flat iron measuring 100x8 mm with rounded corners and a profile at the base characterized by a decorative "comma" positioned at the base (front and back).

Two upper panels (front / back) and two lower panels (front / back), made of galvanized sheet metal and designed for the application of graphics.

Overall weight: 66Kg

COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1018
(Perimeter frame)



RAL 9005
(Panels)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code G536-DIM - Installation template for PopUp Totem

Product code G536-S -

Product code G536-AD -

PRODUCT VARIANTS



Product code G536-BIS - PopUp totem with single-sided noticeboard

3/5

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

DELIVERY

The product comes with steel screws and fixing instructions.

FIXING

The structure must be installed by means of cement foundation and anchoring with anchor bolts. The positioning of the anchor bolts is carried out with the help of special jig (not supplied, can be requested as an accessory item). Please note, the type of foundation to be built should be evaluated by local qualified technician, depending on the characteristics of the ground on which the carport will be installed.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008