

Datasheet


PopUp display case cm140x200h

Product code G541

Rev. 0 of 14/11/2018



1/5

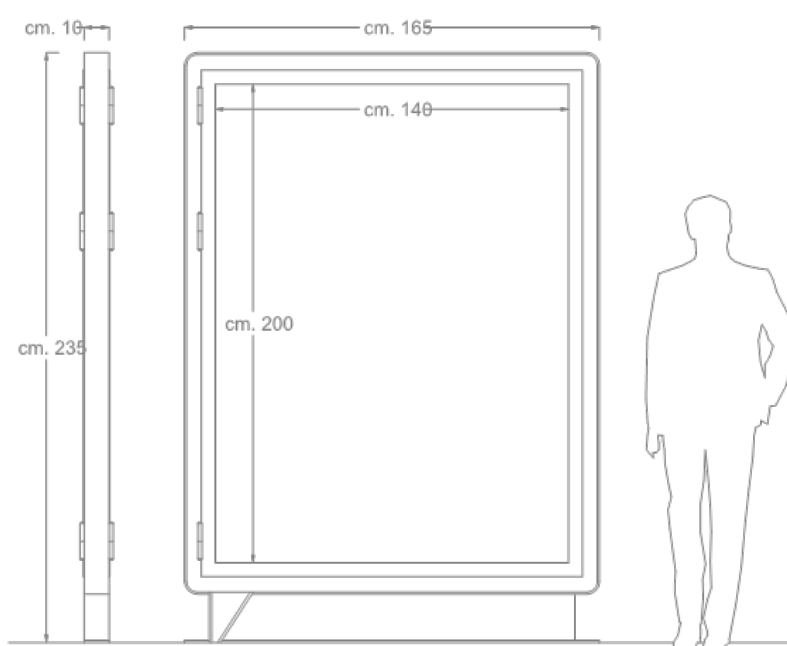

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

PopUp display case cm140x200h

Product code G541

Rev. 0 of 14/11/2018



DESCRIPTION

Structure

With a particular shape, consisting of a perimeter frame in 100x8 mm galvanized flat iron with rounded corners and a base profile made with an IPE beam characterized by a decorative "comma" positioned at the base (front and back). Noticeboard frame (double-sided) made of 2 mm thick galvanized steel box with central dividing panel; No. 2 book-opening doors made of 1.5 mm thick galvanized steel profiles and universal key lock. Reading facade made of 4 mm thick transparent compact polycarbonate, shatterproof, protected from UV rays and particularly suitable for outdoor use.

- Noticeboard internal lighting system consisting of No. 2 horizontally arranged lighting fixtures (upper and lower part); automatic power cut-off system when the doors are opened, wiring with standard cables and power cable with exit at the base (floor level) for subsequent connection to the public network; posting using magnets.
- The notice board is equipped with holes at the base for anchoring to the ground using threaded brackets anchored to the concrete foundation.

Total weight: 153Kg

Datasheet

PopUp display case cm140x200h

Product code G541

Rev. 0 of 14/11/2018



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 3020
(Perimeter frame)



RAL 7001
(Inner box)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code G541-DIM - Installation template for PopUp totem on the ground

PRODUCT VARIANTS



Product code G541-BIS - PopUp display open case 200x140



Product code G539 - Borad PopUp floor standing double sided cm100x140h

Datasheet

PopUp display case cm140x200h

Product code G541

Rev. 0 of 14/11/2018



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

PopUp display case cm140x200h

Product code G541

Rev. 0 of 14/11/2018



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The structure must be installed by means of cement foundation and anchoring with anchor bolts. The positioning of the anchor bolts is carried out with the help of special jig (not supplied, can be requested as an accessory item). Please note, the type of foundation to be built should be evaluated by local qualified technician, depending on the characteristics of the ground on which the carport will be installed.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center

5/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.