
Rev. 0 of 07/08/2020







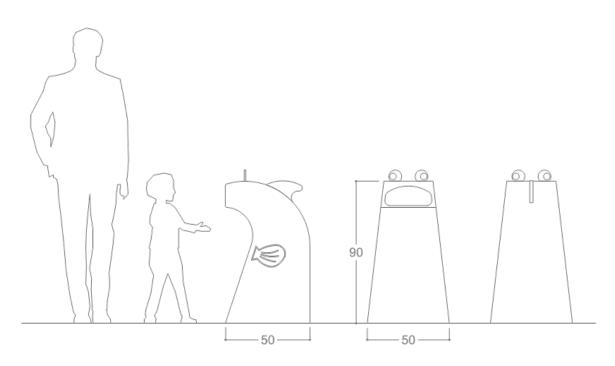

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

+39 0833 95 50 13 WWW.DIMCAR.IT II

INFO@DIMCAR.IT

VIA TAURISANO 101, Z.A. 73059 UGENTO (LE) ITALY P.I. C.F. 031129830752 REA LE 200574 CAP SOC. SOC. € 2.000.000.00

Rev. 0 of 07/08/2020



DESCRIPTION

Structure

The Nino il pesciolino basket was born as a new form of furniture conceived for use by children, with soft lines and playful shapes, designed with dimensions suitable for their height. With a particular shape, the basket is made up of a shaped shaft, made of galvanized steel sheet thickness mm. 3 and thickness mm. 2; characterized by stylised lateral notches that reproduce the "fin" of a little fish, obtained by cutting with laser technology.

The base of the basket is made of galvanized steel sheet and equipped with holes for draining rainwater, and designed for fixing to the ground.

Overall weight: 36Kg

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Rev. 0 of 07/08/2020



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 5012 (Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code G552 - Trash Lauretta the ranetta



Product code G551 - Trash Mauro the Dinosaur

Product code G549 - Trash Adelina the Lumachina

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Rev. 0 of 07/08/2020



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Rev. 0 of 07/08/2020



DELIVERY

FIXING

Product supplied already assembled with steel hardware and instructions for ground fixing.

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.