




DESIGNER

GILLERIO DESIGN

1/5

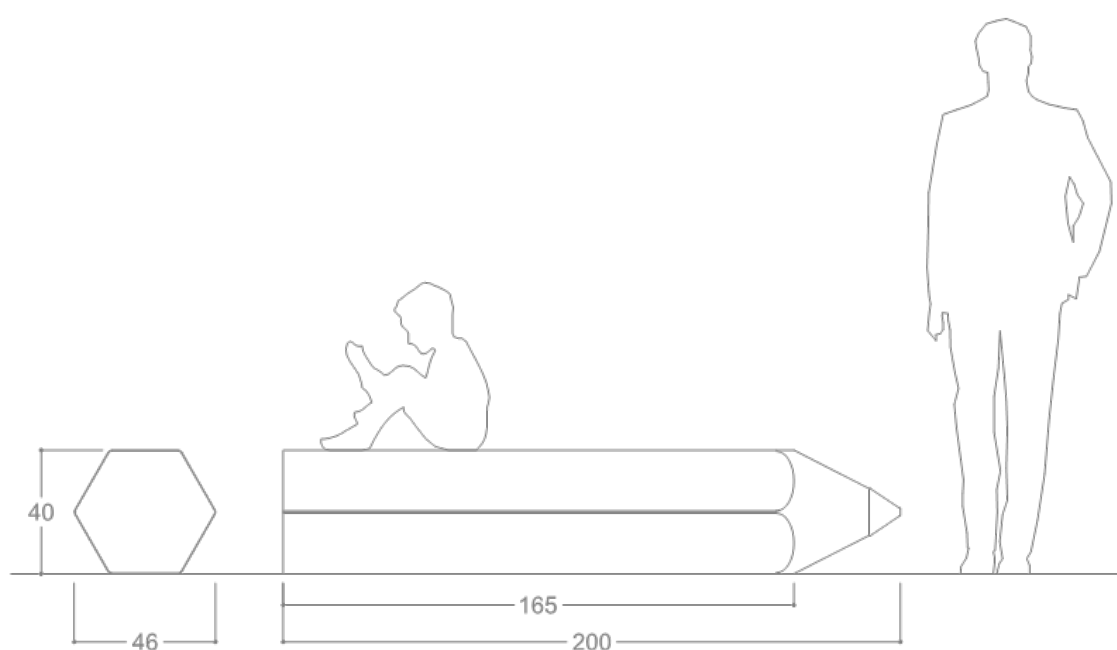

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

DESCRIPTION

Structure

Color and creativity come together to create a one-of-a-kind seat, the Matita bench was born as a new form of furniture designed for use by children. Playful lines, bright colors, all child-friendly. The Matita bench is made up of a hexagonal-shaped frame, made of 2 mm thick galvanized steel sheet and an internal frame in galvanized steel profiles.

- Pencil tip made up of a truncated cone made of 1.5 mm thick galvanized steel sheet, obtained by laser cutting and then shaped. Terminal element in galvanized sheet metal designed to reproduce the "lead" of the pencil.

The pencil bench is equipped with a frame at the base for possible fixing to the ground.

Overall weight: 53Kg

COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1015
(Conical part and cap)



RAL 5012
(Tip and frame)

Customers can request a different finish from the RAL color options available on our website.

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center