
Product code D855-BIS-PVC

Rev. 0 of 07/08/2020







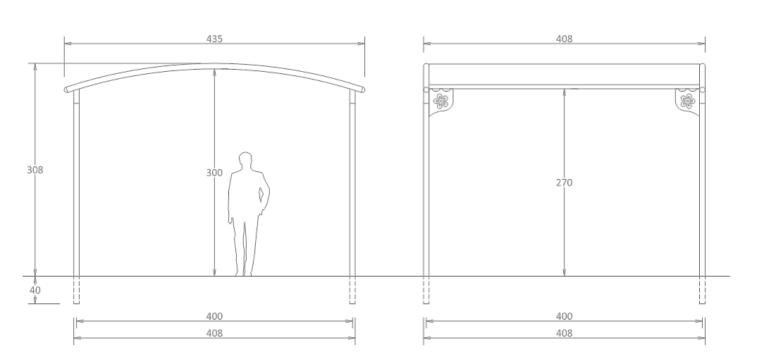

Dimens has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

7

Abacus outdoor classroom to be buried with fireproof and waterproof PVC sheet, white color Product code D855-BIS-PVC



Rev. 0 of 07/08/2020

DESCRIPTION

Structure

Outdoor classroom made up of vertical support uprights and arches in round tube of galvanized steel Ø mm. 76x2, and upper crosspieces, made of round tube of galvanized steel Ø mm. 60x2. Decorative shapes placed on the 4 sides with stylised carvings obtained by cutting with laser technology, and made of galvanized sheet metal. Brackets to be cemented on the foundation, for the installation of the vertical uprights, in galvanized steel profiles; roofing made of white PVC sheet.

Overall weight: 185Kg

വ

Abacus outdoor classroom to be buried with fireproof and waterproof PVC sheet, white color Product code D855-BIS-PVC



Rev. 0 of 07/08/2020

COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 3020 (Decorative shapes)



RAL 5012 (Decorative shapes)



RAL 6017 (Decorative shapes)




RAL 9010 (Supporting structure)



RAL 1018 (Decorative shapes)

Customers can request a different finish from the RAL color options available on our website.





Product code D855-BIS - Abacus outdoor classroom to be buried with beige shade cloth

PRODUCT VARIANTS





Product code D855-P - Abacus pergola with beige shade plates and cloth

Abacus outdoor classroom to be buried with fireproof and waterproof PVC sheet, white color Product code D855-BIS-PVC



Rev. 0 of 07/08/2020

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Abacus outdoor classroom to be buried with fireproof and waterproof PVC sheet, white color Product code D855-BIS-PVC



Rev. 0 of 07/08/2020

	DELIVERY
The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.	
	FIXING

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

The product must be installed by cementing.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018

imcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles