
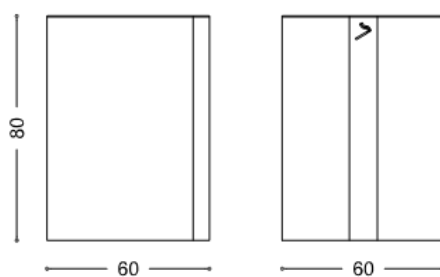


Datasheet

Large trash bin Alvarian

Product code G455

Rev. 0 of 29/10/2020



Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Large trash bin Alvarian

Product code G455

Rev. 0 of 29/10/2020



DESCRIPTION

Structure

Alvarian model litter bin consisting of a shaped shaft made of 2 mm thick galvanized steel sheet, complete with shaped base in galvanized sheet with holes for draining rainwater and equipped with holes for fixing to the ground. Shaped upper ring, made of 3 mm thick galvanized sheet, obtained by laser cutting with a circular hole for inserting waste.

- The particular shape of the litter bin is characterized by the presence of a cylindrical ashtray on the rear part, which extends across the entire height of the litter bin, obtained from a circular section profile in galvanized steel and equipped with micro-perforated stainless steel sheet for extinguishing and inserting cigarette butts
- Emptying occurs by unscrewing and removing the cigarette butts.

Overall weight: 48Kg

Datasheet

Large trash bin Alvarian

Product code G455

Rev. 0 of 29/10/2020



FINISH ACCORDING TO THE CATALOGUE



RAL 1018
(Ashtray)



RAL 9016
(Basket)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code G455-P -

PRODUCT VARIANTS



Product code G455-BIS - Alvarian outdoor waste bin with lid

Datasheet

Large trash bin Alvarian

Product code G455

Rev. 0 of 29/10/2020



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Large trash bin Alvarian

Product code G455

Rev. 0 of 29/10/2020



DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto è predisposto per il fissaggio al suolo mediante tirafondi e tasselli ad espansione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018