

Datasheet


Wall-attached Fumy ashtray

Product code 374

Rev. 1 of 25/10/2016



1/5

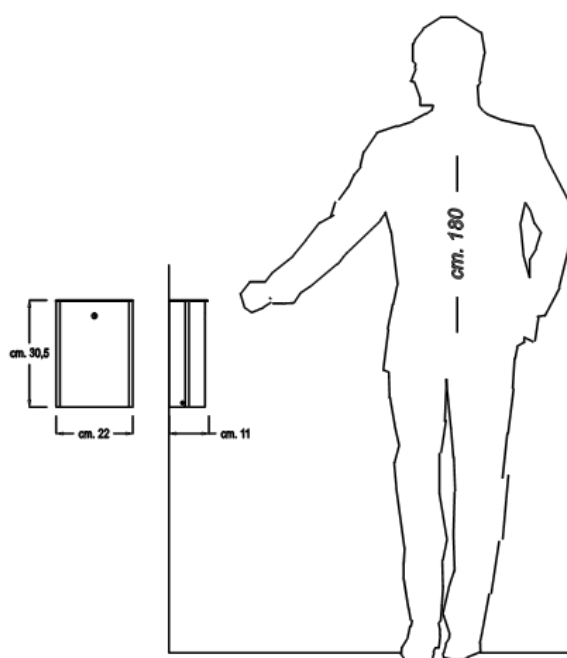

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Wall-attached Fumy ashtray

Product code 374

Rev. 1 of 25/10/2016



DESCRIPTION

Structure

The design of fumy ashtrays is based on a box made of galvanized sheet thickness of 1.2 mm that can be mounted on walls using holes on the back facade. The top plate, which is crafted from galvanized sheet thickness mm. 3, is created by laser cutting and has trapezoidal carving with micro-perforated sheet, as well as a stylized emptying for quenching and inserting the dead butt. Made of galvanized sheet thickness mm 1.2, the internal container has anti-cutting side edging. To prevent direct contact when removing the butt, the container is hinged to the structure and has a single-key lock.

- The container's front is marked with a circular Pictogram that indicates "ASHTRAY".

Overall weight: 3Kg

Datasheet

Wall-attached Fumy ashtray

Product code 374

Rev. 1 of 25/10/2016



FINISH ACCORDING TO THE CATALOGUE



Gun metal gray
(The top plate and vertical bands)



Brilliant aluminum
(Container)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code 373 - Ashtray Smokers](#)

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Wall-attached Fumy ashtray

Product code 374

Rev. 1 of 25/10/2016



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Wall-attached Fumy ashtray

Product code 374

Rev. 1 of 25/10/2016



DELIVERY

Product supplied already assembled with steel hardware and instructions for fixing.

FIXING

The product is designed to be mounted on the wall using expansion anchors and dowels.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008