


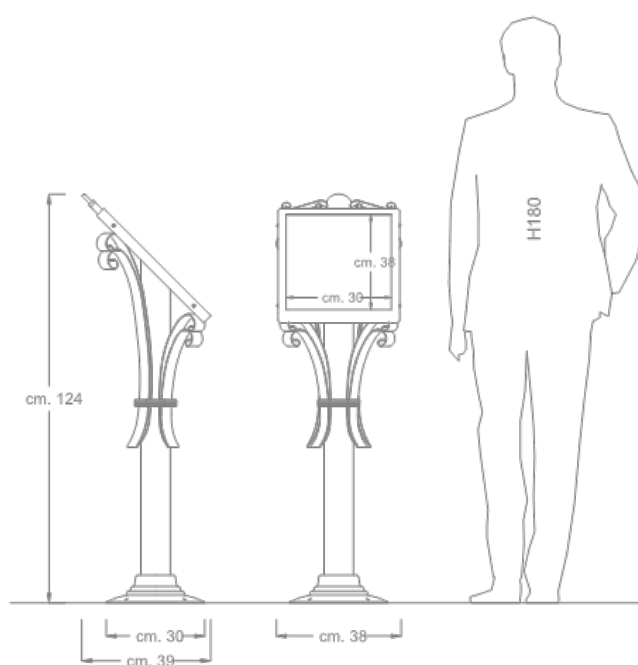

---

## DESCRIPTION

### Structure

Support column made of round tube of galvanized steel Ø mm. 89x2; adorned in the upper part by N. 4 decorative volutes, manually shaped in galvanized flat iron mm. 40x3. The volutes are wrapped around the upright, in the central part, by a spiral in galvanized solid round Ø mm. 5. At the base decorative flange characterized by harmonious overhangs. Reading surface in galvanized sheet metal thickness mm. 2 bordered on the perimeter. An external frame in galvanized steel angular profile thickness mm. 3, adorned with decorative elements in the upper part, allows the locking of the panel in transparent compact polycarbonate thickness mm. 3.

**Total weight:** 16Kg

---

## FINISH ACCORDING TO THE CATALOGUE



Gun metal gray  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

---

## PRODUCT OPTIONALS

Product code 254-PL -

## TREATMENTS AND FINISHES THAT PREVENT CORROSION

### Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

### Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

### Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

### Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

### Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

### Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

---

## DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

---

## FIXING

Il prodotto è predisposto per il fissaggio al suolo mediante tirafondi e tasselli ad espansione.

---

## CORPORATE CERTIFICATES

### ISO 9001:2015

Quality Management System.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018