


Datasheet

Gazebo Belvedere
Product code 2002

Rev. 2 of 03/02/2017

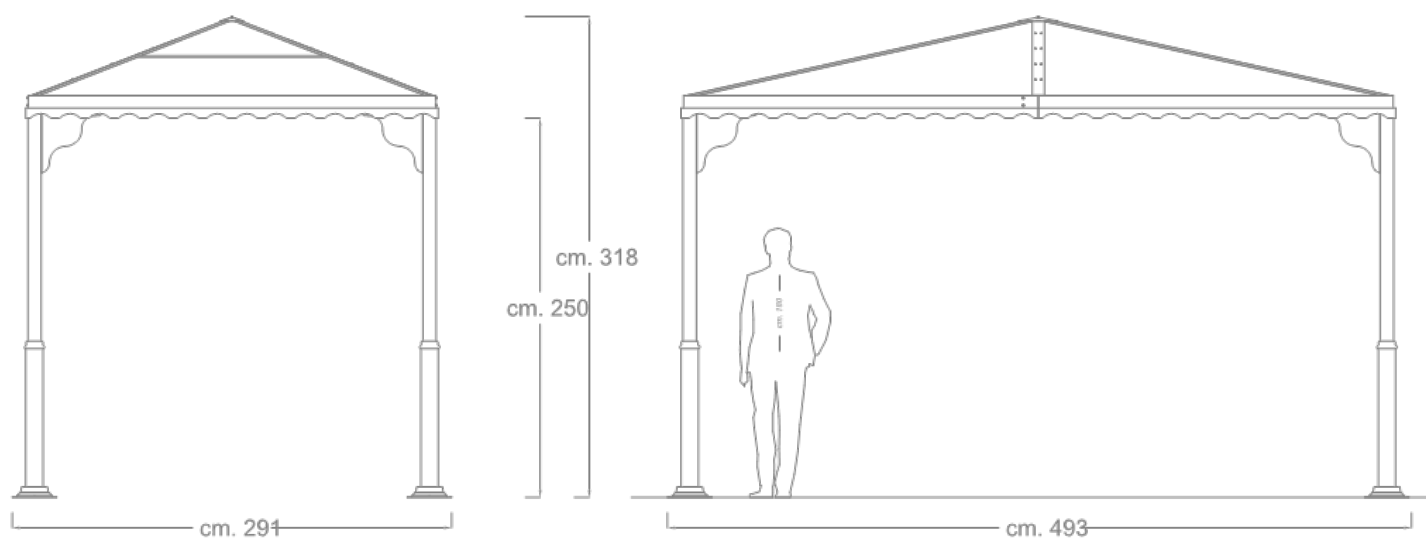

2/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DESCRIPTION

Structure

With a rectangular configuration, the Belvedere gazebo is made up of 4 vertical uprights in round tubular galvanized steel Ø mm. 114x3 (lower part) and Ø mm. 89x3 (upper part), the uprights are characterized by a decorative intermediate element in turned steel. Each single upright is complete with a flange at the base.

- Upper perimeter frame made of galvanized sheet metal, thickness mm. 2, obtained by laser cutting, shaped in "Liberty" style.
- To connect the vertical uprights and the upper perimeter frames, there are 8 shaped decorative elements.
- Pyramid-shaped covering in opaque honeycomb polycarbonate, thickness mm. 6, supported by galvanized steel profiles and by galvanized rectangular tubulars, thickness mm. 80x30x2.

Overall weight: 286Kg

Datasheet

Gazebo Belvedere
Product code 2002

Rev. 2 of 03/02/2017



FINISH ACCORDING TO THE CATALOGUE



Gun metal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

Datasheet

Gazebo Belvedere
Product code 2002

Rev. 2 of 03/02/2017



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

5/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

La struttura è dotata alla base di piastre con fori per l'ancoraggio al suolo.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

EN 1090-1:2009

The product bears CE Marking in accordance with EN 1090-1:2009 in execution class EXC2.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018