




1/5

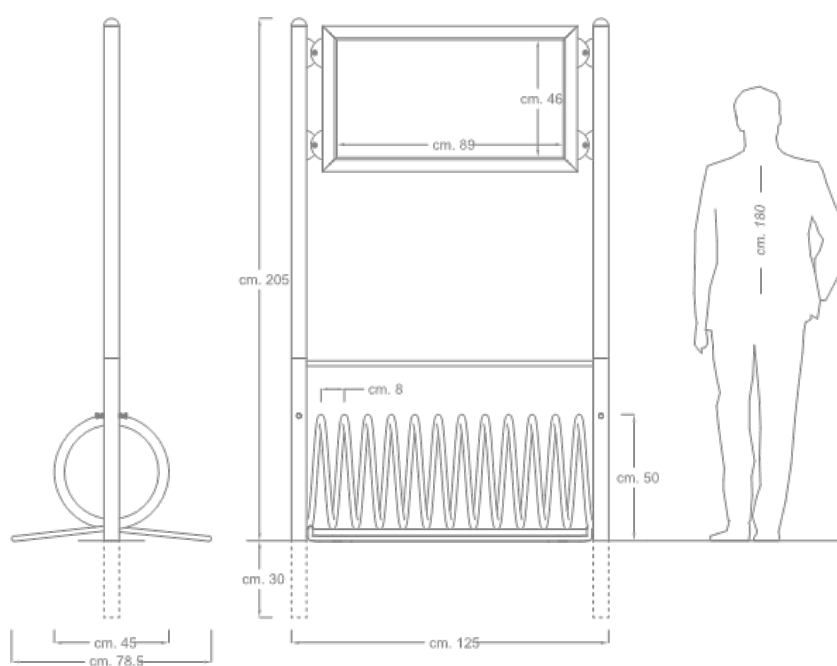

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Bicycle Stands Elix Display

Product code 236-D

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Elix Display bike rack composed of N. 2 support uprights in round tube of galvanized steel Ø mm. 60x2 complete with PVC end caps with spherical head; each single upright is provided in the upper part with N. 2 plates for connecting the table.

In the upper part, horizontal connection crosspiece in round tube of galvanized steel Ø mm. 20x1.5. In the lower part, horizontal connection crosspiece in round tube of galvanized steel Ø mm. 25x1.5 complete with support feet.

Helical bike-stop element made of oval section tube of mm. 40x20x1.5 with the possibility of parking on both sides. N. 2 "U" shaped wheel-stop elements in round tube of galvanized steel Ø mm. 20x1.5. Double-sided table consisting of a perimeter frame made of 1.2 mm thick galvanized steel box; 1.2 mm thick galvanized sheet metal billboard applied inside the box profile; No. 4 galvanized sheet metal connection plates welded on the short sides of the perimeter frame.

Total weight: 50Kg

Datasheet

Bicycle Stands Elix Display

Product code 236-D

Rev. 0 of 10/06/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 236-D-AD -

PRODUCT VARIANTS



Product code 236 - Bicycle Stands Elix

Datasheet

Bicycle Stands Elix Display

Product code 236-D

Rev. 0 of 10/06/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Bicycle Stands Elix Display

Product code 236-D

Rev. 0 of 10/06/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center