
Rev. 0 of 10/06/2016







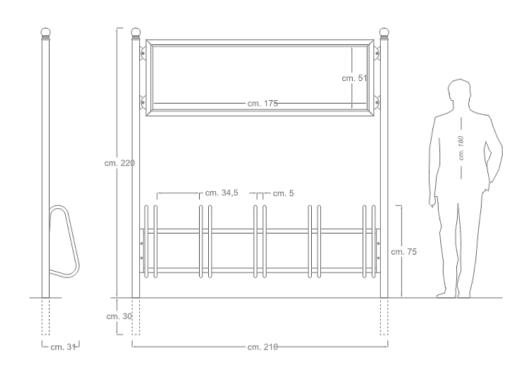

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

/2

# Datasheet

Bicycle stands Liberty Display Product code 286-D

Rev. 0 of 10/06/2016



DESCRIPTION

#### Structure

Liberty bike rack for 5 places composed of 2 support uprights in round tube of galvanized steel Ø mm. 60x2 adorned in the upper part with decorative friezes. 2 horizontal connecting crosspieces in round tube of galvanized steel Ø mm. 35x1.5; 5 bike-holding brackets in round tube of galvanized steel Ø mm. 25x1.5.

Total weight: 48Kg

5/2

Rev. 0 of 10/06/2016



#### **COLOR FINISH AS PROVIDED IN THE CATALOG**



Customers can request a different finish from the RAL color options available on our website.

**PRODUCT OPTIONALS** 

Product code 286-D-AD -

**PRODUCT VARIANTS** 



Product code 286 - Bicycle stands Liberty

## 4/5

## Datasheet

Bicycle stands Liberty Display Product code 286-D

Rev. 0 of 10/06/2016



#### ANTICORROSIVE TREATMENTS AND FINISHES

### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

#### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### **Anti-corrosive application**

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

#### **Anticorrosive polymerization**

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

## Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

# Datasheet

# Bicycle stands Liberty Display Product code 286-D

Rev. 0 of 10/06/2016



|  | DELIVERY |
|--|----------|
|  |          |

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

**FIXING** 

The product must be installed by cementing.

**CORPORATE CERTIFICATIONS** 

#### ISO 9001:2015

Quality management system.

#### UNI EN ISO 3834-3:2021

Welding quality management system.

### **Processing center**

Certificate of Processing Center

2