

Datasheet


Bin Clean with wall fixing

Product code 326-M

Rev. 1 of 10/06/2016



1/5

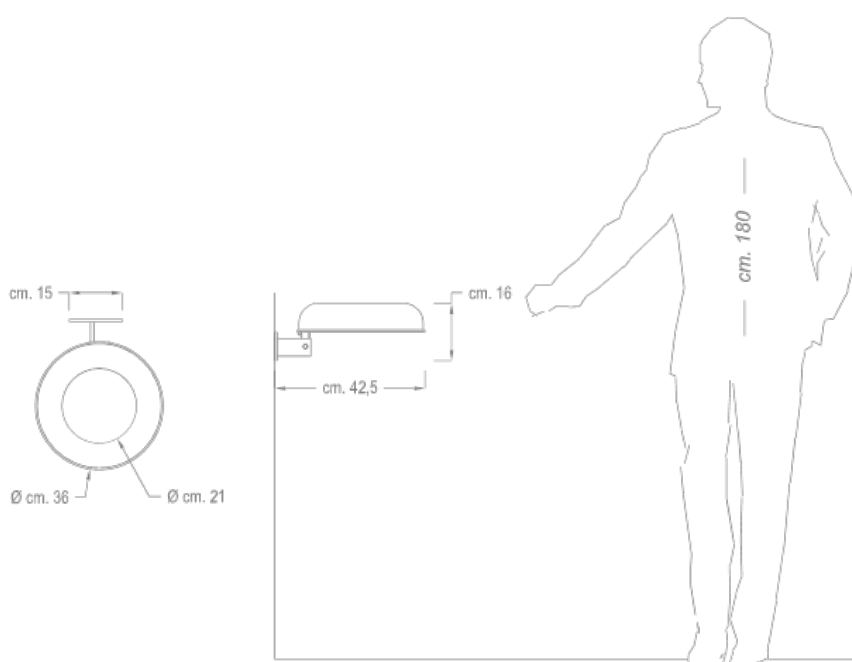

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Bin Clean with wall fixing

Product code 326-M

Rev. 1 of 10/06/2016



DESCRIPTION

Structure

Single Clean model anti-terrorism bin, for wall mounting. Consisting of N. 01 support bracket in 100x6 mm galvanized plate with holes for wall mounting; and connection bracket, for fixing the ring, in 50x8 mm galvanized plate.

- Bag-holder ring consisting of a shaped lid, of the opening type, made of 1.2 mm thick galvanized sheet metal with anti-cut edging and a plate indicating the type of collection.
- The lid is hinged to the bag-holder ring and provided with a hole for inserting waste.
- Fixed internal bag-holder made of galvanized steel profile.
- Emptying by opening the bag-holder ring and extracting the bag (bag not supplied).

Overall weight: 3Kg

Datasheet

Bin Clean with wall fixing

Product code 326-M

Rev. 1 of 10/06/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



Gunmetal gray
(Support plate)



RAL 1018
("Plastic" collection ring)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code 326 - Bin Clean](#)

Datasheet

Bin Clean with wall fixing

Product code 326-M

Rev. 1 of 10/06/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Bin Clean with wall fixing

Product code 326-M

Rev. 1 of 10/06/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

Fastening is done using a support plate provided with holes for fixing to the wall by means of anchor bolts and expansion plugs

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center