
City Life

Design



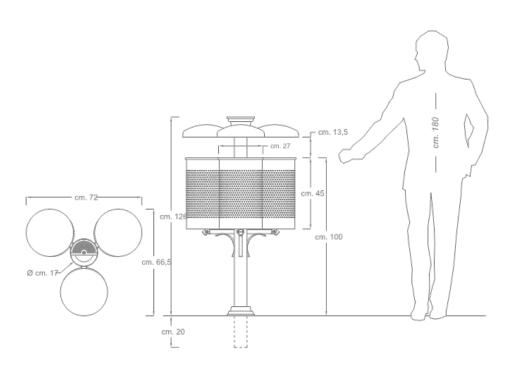

Datasheet

Bin Trio with ashtray Product code 376

Rev. 0 of 20/12/2016



DESCRIPTION

Structure

The Trio wastebasket with ashtray is made up of a support upright in round tubular galvanized steel Ø mm. 80x2, with a decorative flange at the base to cover the hole made for burial. Upper ashtray, circular in shape, equipped with a microperforated plate for extinguishing cigarettes; the plate is semi-circular in shape and is made of polished AISI 304 stainless steel sheet, thickness mm. 1; the extraction of the ashtray is guaranteed by a lock.

- No. 3 shaped folding lids, made of galvanized sheet metal, thickness mm. 3; the folding of the lids facilitates the extraction of any internal bags.
- No. 3 shaped lower arms, to support the basket, with a decorative element in galvanized flat iron.
- No. 3 cylindrical baskets, made of galvanized sheet metal, thickness mm. 1 with alternating circular holes of Ø mm. 6, upper part with anti-cut edges and labels indicating the type of collection; bottom made of 1 mm thick galvanized steel sheet, with holes for draining rainwater.

Overall weight: 26Kg

Ŋ

Datasheet Bin Trio with ashtray Product code 376

Rev. 0 of 20/12/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 9016 (Basket and lid)



Gunmetal gray (Upright)



RAL 1018 (Basket and lid)



RAL 5017 (Basket and lid)

Customers can request a different finish from the RAL color options available on our website.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items

<u>ر</u>

Datasheet

Bin Trio with ashtray Product code 376

Rev. 0 of 20/12/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

INFO@DIMCAR.IT

Datasheet

Bin Trio with ashtray Product code 376

Rev. 0 of 20/12/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product must be installed by cementing.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center