


Datasheet

Flower Box Camelia

Product code 382

Rev. 1 of 04/08/2023

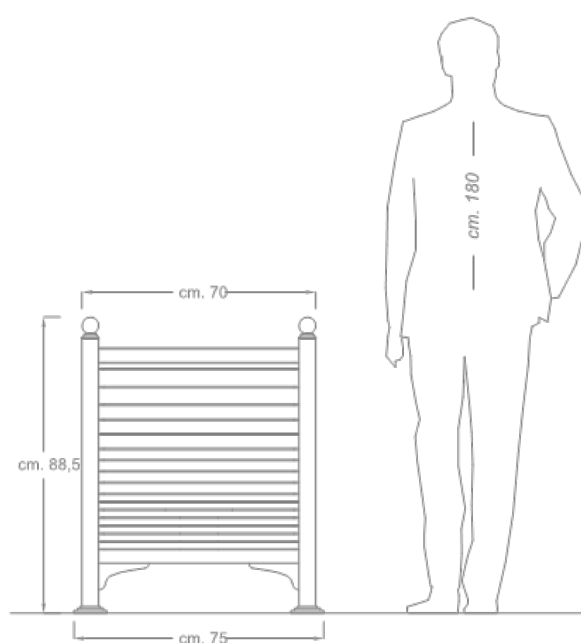

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DESCRIPTION

Structure

The Camelia Planter is characterized by its square shape; it is composed of N. 4 columns in square tube of galvanized steel mm. 50x50x1.5 with a decorative element at the top; each individual column is equipped with a plate at the base in galvanized steel, and decorative reinforcement supports obtained from high definition plasma cutting.

- N. 8 connecting crosspieces in square tube of galvanized steel mm. 40x40x1.5; N. 4 walls made with rectangular section profiles appropriately spaced from each other.
- The profiles used have decreasing sections starting from the upper part; this feature gives the product a pleasant aesthetic effect.
- Internal container made of galvanized sheet metal.

Overall weight: 62Kg

Datasheet

Flower Box Camelia

Product code 382


Rev. 1 of 04/08/2023



FINISH ACCORDING TO THE CATALOGUE



RAL 9016
(Frame and inner tank)



RAL 3005
(Walls)

Customers can request a different finish from the RAL color options available on our website.

Datasheet

Flower Box Camelia

Product code 382

Rev. 1 of 04/08/2023



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

1/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto non necessita di ancoraggio al suolo.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018