


# Datasheet

Cenerino ashtrays with lid and wall mounting

Product code 411-M

Rev. 0 of 10/06/2016

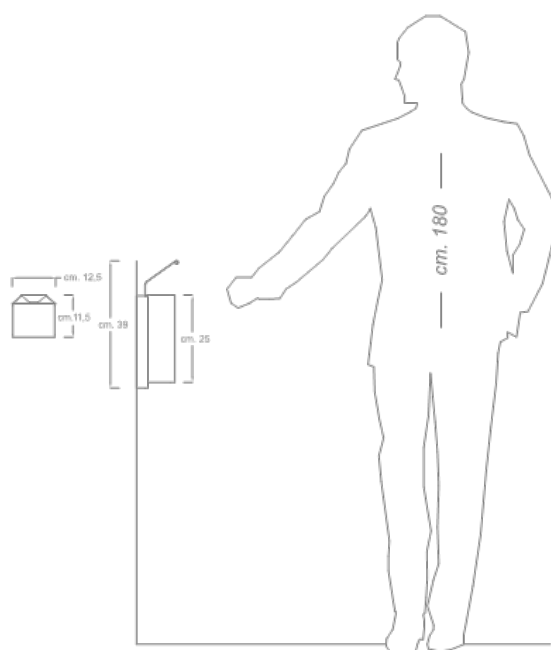

1/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

# Datasheet

Cenerino ashtrays with lid and wall mounting

Product code 411-M

Rev. 0 of 10/06/2016



## DESCRIPTION

### Structure

Cenerino ashtray with lid and wall attachment consisting of a rear box made of 1.2 mm thick galvanized sheet metal with provision for wall mounting. Shaped container made of 1.5 mm thick galvanized sheet metal with rounded edges on the front and complete with micro-perforated plate for extinguishing cigarettes, made of 1 mm thick polished AISI 304 stainless steel sheet.

- Shaped profile with container cover function in 1.5 mm thick galvanized sheet metal with front edging.
- Bottom in galvanized steel sheet with holes for draining rainwater.

**Overall weight:** 2Kg

# Datasheet

Cenerino ashtrays with lid and wall mounting

Product code 411-M

Rev. 0 of 10/06/2016



## FINISH ACCORDING TO THE CATALOGUE



Rust  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

## PRODUCT VARIANTS



Product code 411-BIS - Cenerino ashtray with lid and column



Product code 411 - Ashtray Cenerino with lid and mounting on existing pole

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

# Datasheet

Cenerino ashtrays with lid and wall mounting

Product code 411-M

Rev. 0 of 10/06/2016



## TREATMENTS AND FINISHES THAT PREVENT CORROSION

### Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

### Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

### Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

### Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

### Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

### Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

# Datasheet

Cenerino ashtrays with lid and wall mounting

Product code 411-M

Rev. 0 of 10/06/2016



---

## DELIVERY

The product comes with steel screws and fixing instructions.

---

## FIXING

The product is designed to be mounted on the wall using expansion anchors and dowels.

---

## CORPORATE CERTIFICATES

### ISO 9001:2015

Quality Management System.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018