
Rev. 0 of 05/09/2024







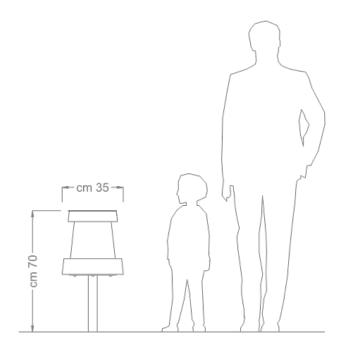

## Datasheet

Cest-It litter bin
Product code D867

Rev. 0 of 05/09/2024



**DESCRIPTION** 

#### Structure

Waste bin designed for use by children. Playful lines and bright colors, all child-friendly.

- The barrel is made of a single shaped box, with the characteristic "pin" shape, made of 1.5 mm thick galvanized sheet metal, with shaped panels cut using laser technology.
- Upper ring made of 3 mm thick galvanized sheet metal. With a small hole for inserting waste.
- Internal container made of galvanized sheet metal.
- Support pole made of 60 mm section galvanized steel round tube.

Overall weight: 11Kg

D

# Datasheet Cest-It litter bin Product code D867

Rev. 0 of 05/09/2024



### **COLOR FINISH AS PROVIDED IN THE CATALOG**





Customers can request a different finish from the RAL color options available on our website.

# Datasheet

Cest-It litter bin Product code D867

Rev. 0 of 05/09/2024



#### ANTICORROSIVE TREATMENTS AND FINISHES

#### Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

#### Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

### **Anticorrosive application**

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

### **Anticorrosive polymerization**

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

## Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

#### Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

## Datasheet

# Cest-It litter bin Product code D867

Rev. 0 of 05/09/2024



	CODDODATE CERTIFICATIONS
The product must be installed by cementing.	
	FIXING
The product comes with steel screws and fixing instructions.	DELIVERT
	DELIVERY

### ISO 9001:2015

Quality Management System.

### **UNI EN ISO 3834-3:2021**

Welding quality management system.

### **Processing center**

Certificate according to Italian Law D.M. of 17 Jan 2018

D