

Datasheet


Seat with flower stand Cetta the happy one

Product code D866-C

Rev. 1 of 21/10/2024



1/5

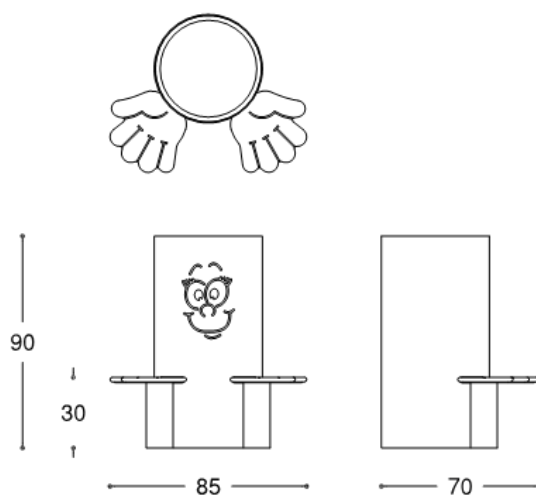

Datasheet

Seat with flower stand Cetta the happy one

Product code D866-C

Rev. 1 of 21/10/2024



DESCRIPTION

Structure

Seat with flowerbox, consisting of a cylindrical main structure, made of 3 mm thick galvanized steel sheet, featuring a panel with a decorative carving obtained by laser cutting, with a playful expression on the face.

Inside the structure is equipped with a tub made of galvanized steel.

Two seats at the base, with an open hand shape, made of Polystone® plastic material and lower support made of galvanized steel profiles with a fixing system to the main structure.

Overall weight: 110Kg

Datasheet

Seat with flower stand Cetta the happy one

Product code D866-C

Rev. 1 of 21/10/2024



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 9005
(Flowerbox)



RAL 3015
(Main structure)



RAL 9010
(Seat supports)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code D866-V - Seat with flower stand Vito Vito l'impaurito



Product code D866-T - Seat with flower stand Tito the grumpy



Product code D866-G - Seat with flower stand Giorgione the funny



Product code D866-M - Seat with flower stand Martina the shy



Product code D866-R - Seat with flower stand Renato the disconsolate



Product code D866-P - Seat with flower stand Paolone the grumpy

Datasheet

Seat with flower stand Cetta the happy one

Product code D866-C

Rev. 1 of 21/10/2024



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Datasheet

Seat with flower stand Cetta the happy one

Product code D866-C

Rev. 1 of 21/10/2024



DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018