


Datasheet

Delta bench of cm. 150
Product code 1141-150

Rev. 2 of 06/04/2020



4/5

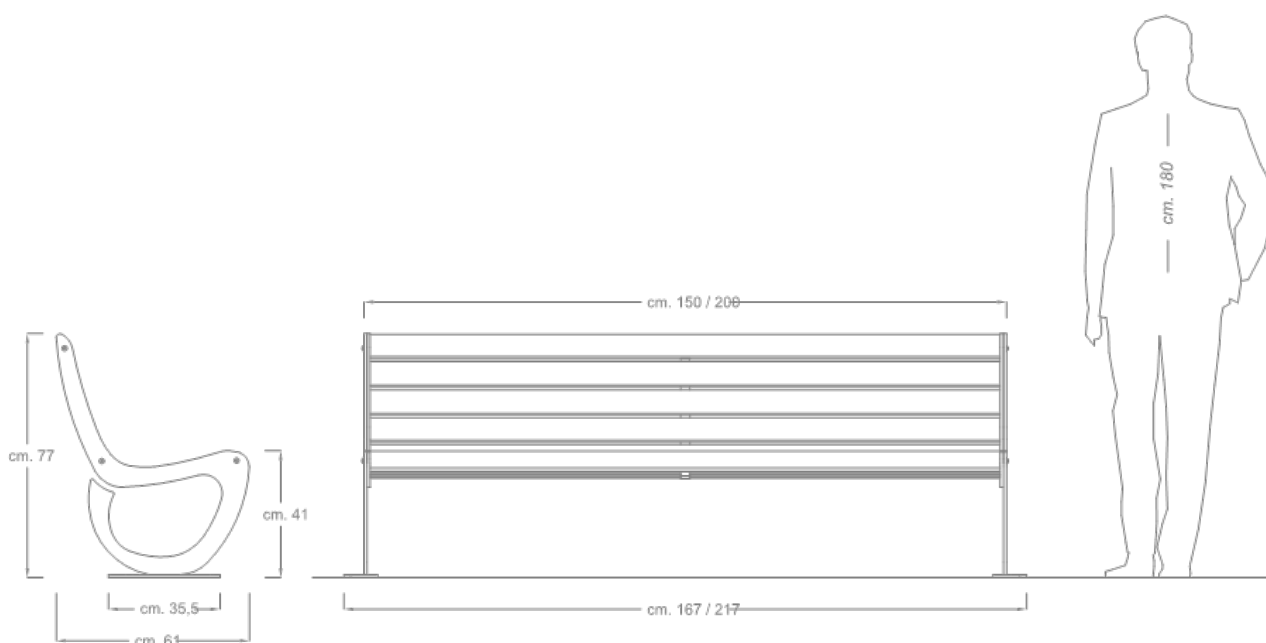

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Delta bench of cm. 150
Product code 1141-150

Rev. 2 of 06/04/2020



DESCRIPTION

Structure

Delta bench composed of 2 supports in 10 mm thick galvanized steel sheet, recalling the stylized letter delta in shape. Each individual support is provided with a base plate in galvanized sheet metal harmonized with the supports.

- Seat-backrest shell made with profiles in galvanized steel tube with oval section of mm. 60x30x1.5.
- The profiles on the seat and on the backrest are welded on special galvanized steel shapes that give it the anatomical shape.

Total weight: 61Kg

Datasheet

Delta bench of cm. 150
Product code 1141-150


Rev. 2 of 06/04/2020



FINISH ACCORDING TO THE CATALOGUE



Brilliant aluminum
(Supports)



RAL 3005
(Seat and back shell)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 1141-I - Delta Inclusion bench of cm. 200



Product code 1141-P-200 - Delta seat of cm. 200



Product code 1141-200 - Delta bench of cm. 200



Product code 1141-P-150 - Delta seat of cm. 150

3/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Delta bench of cm. 150
Product code 1141-150

Rev. 2 of 06/04/2020



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

5/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Delta bench of cm. 150
Product code 1141-150

Rev. 2 of 06/04/2020



DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto è predisposto per il fissaggio al suolo mediante tirafondi e tasselli ad espansione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018


Datasheet

Delta bench of cm. 200
Product code 1141-200

Rev. 2 of 06/04/2020



2/5

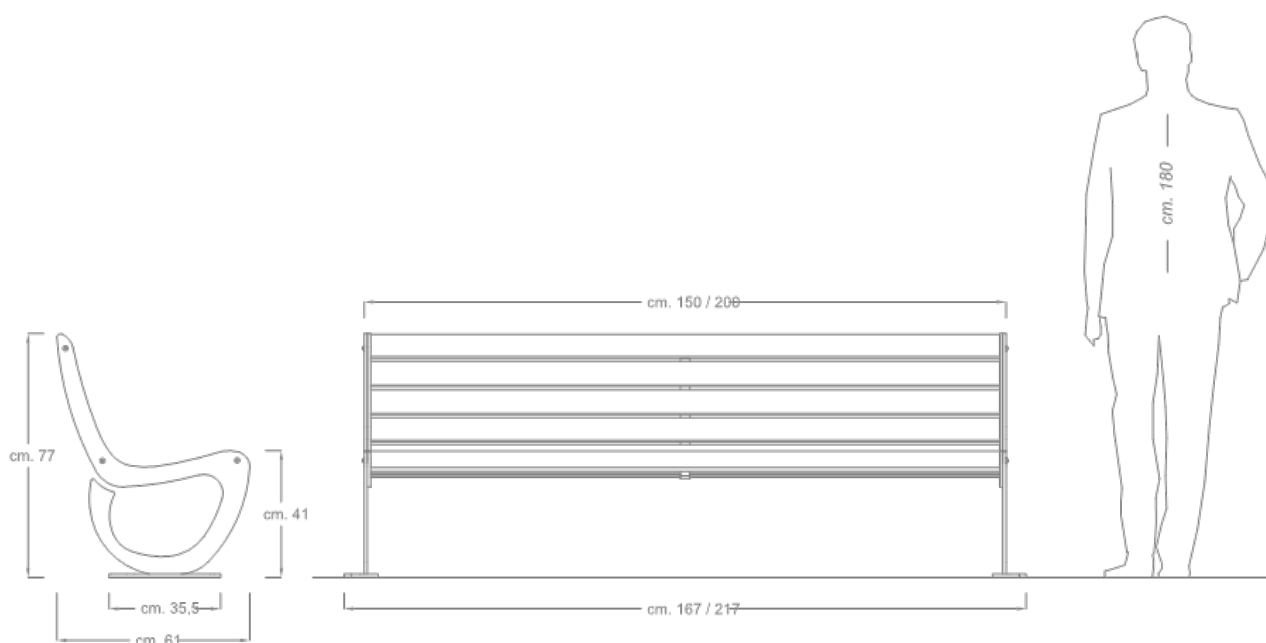

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Delta bench of cm. 200
Product code 1141-200

Rev. 2 of 06/04/2020



DESCRIPTION

Structure

Delta bench composed of 2 supports in 10 mm thick galvanized steel sheet, recalling the stylized letter delta in shape. Each individual support is provided with a base plate in galvanized sheet metal harmonized with the supports.

- Seat-backrest shell made with profiles in galvanized steel tube with oval section of mm. 60x30x1.5.
- The profiles on the seat and on the backrest are welded on special galvanized steel shapes that give it the anatomical shape.

Total weight: 72Kg


Datasheet

Delta bench of cm. 200
Product code 1141-200

Rev. 2 of 06/04/2020



FINISH ACCORDING TO THE CATALOGUE



RAL 3005
(Seat and back shell)



Brilliant aluminum
(Supports)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 1141-150 - Delta bench of cm. 150



Product code 1141-I - Delta Inclusion bench of cm. 200



Product code 1141-P-200 - Delta seat of cm. 200



Product code 1141-P-150 - Delta seat of cm. 150

1/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Delta bench of cm. 200
Product code 1141-200

Rev. 2 of 06/04/2020



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

5/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Delta bench of cm. 200
Product code 1141-200

Rev. 2 of 06/04/2020



DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto è predisposto per il fissaggio al suolo mediante tirafondi e tasselli ad espansione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018