



Datasheet

Dynamo model cover
Product code 815

Rev. 0 of 27/04/2020



1/5

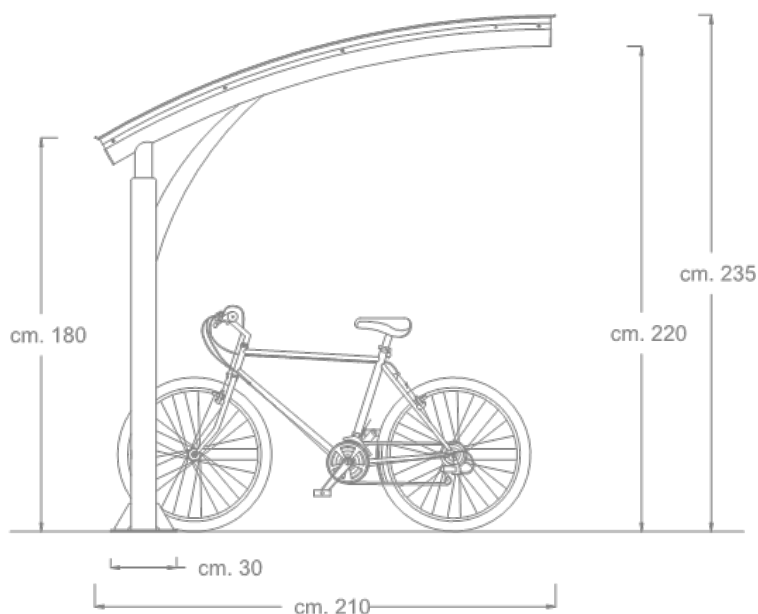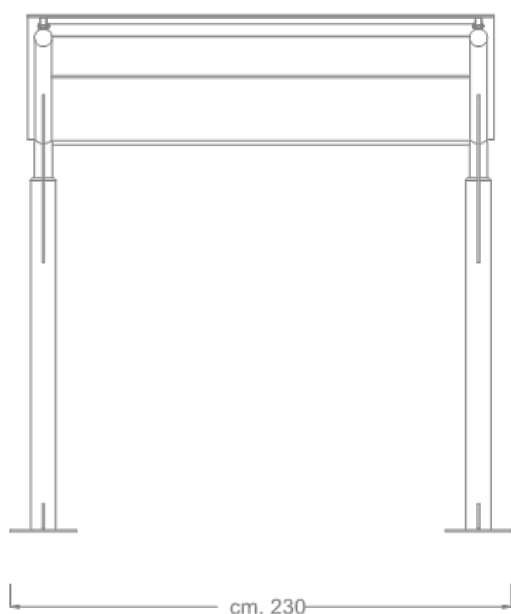

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

DESCRIPTION

Structure

Dynamo model cover designed for storing bicycles and/or motorcycles. Made up of 2 vertical load-bearing structures, made up of uprights in round tubing in galvanized steel Ø mm. 114x3 (lower part), and upper arches in round tubing in galvanized steel Ø mm. 80x2. Each single upright is complete with a circular plate at the base, in galvanized sheet metal, thickness mm. 8, stiffening triangles connecting the uprights and the plates, also made of galvanized sheet metal, thickness mm. 8, and shaped supports connecting the uprights and the upper arches.

- Covering frame made of arches in galvanized steel profiles; the arches are connected and made integral with each other by a frame in square section tubing in galvanized steel, thickness mm. 25x25x1.5.
- Covering made of compact smoked polycarbonate, thickness mm. 5, shatterproof, UV protected and particularly suitable for outdoor use; rear gutter obtained by shaping the same polycarbonate, for collecting and draining rainwater.

Total weight: 152Kg

Datasheet

Dynamo model cover

Product code 815

Rev. 0 of 27/04/2020



COLOR FINISH AS PROVIDED IN THE CATALOG



Gun metal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 815-DIM - Installation template for Dynamo canopy

ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The structure must be installed by means of cement foundation and anchoring with anchor bolts. The positioning of the anchor bolts is carried out with the help of special jig (not supplied, can be requested as an accessory item). Please note, the type of foundation to be built should be evaluated by local qualified technician, depending on the characteristics of the ground on which the carport will be installed.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

EN 1090-1:2009

The product bears CE Marking in accordance with EN 1090-1:2009 in execution class EXC2.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018