
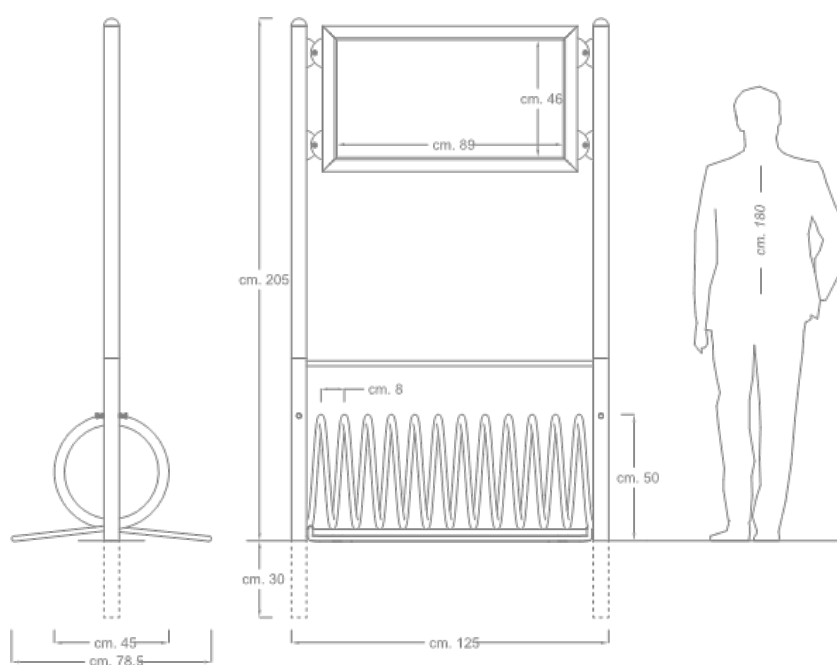


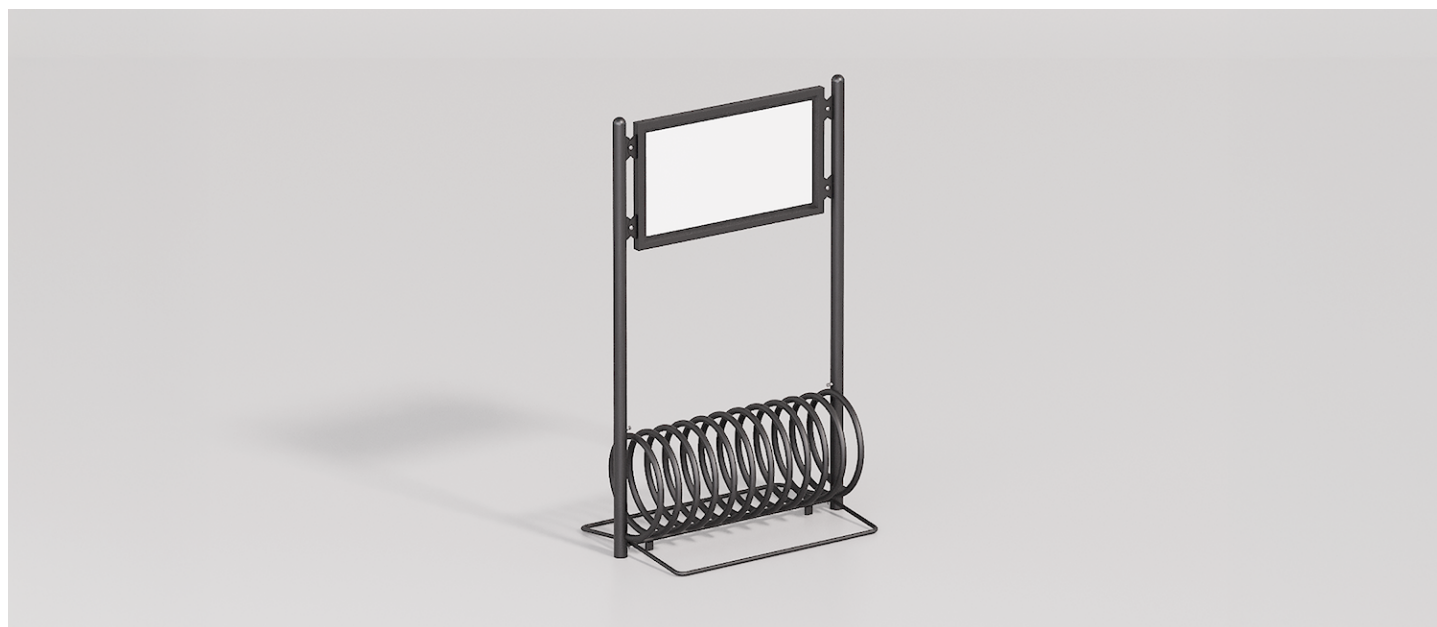

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DESCRIPTION

Structure

Elix Display bike rack composed of N. 2 support uprights in round tube of galvanized steel Ø mm. 60x2 complete with PVC end caps with spherical head; each single upright is provided in the upper part with N. 2 plates for connecting the table.

In the upper part, horizontal connection crosspiece in round tube of galvanized steel Ø mm. 20x1.5. In the lower part, horizontal connection crosspiece in round tube of galvanized steel Ø mm. 25x1.5 complete with support feet.

Helical bike-stop element made of oval section tube of mm. 40x20x1.5 with the possibility of parking on both sides. N. 2 "U" shaped wheel-stop elements in round tube of galvanized steel Ø mm. 20x1.5. Double-sided table consisting of a perimeter frame made of 1.2 mm thick galvanized steel box; 1.2 mm thick galvanized sheet metal billboard applied inside the box profile; No. 4 galvanized sheet metal connection plates welded on the short sides of the perimeter frame.

Total weight: 50Kg

Datasheet

Bicycle Stands Elix Display

Product code 236-D

Rev. 0 of 10/06/2016



FINISH ACCORDING TO THE CATALOGUE



Gun metal gray
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 236-D-AD -

PRODUCT VARIANTS



Product code 236 - Bicycle Stands Elix

Datasheet

Bicycle Stands Elix Display

Product code 236-D

Rev. 0 of 10/06/2016



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

1/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Bicycle Stands Elix Display

Product code 236-D

Rev. 0 of 10/06/2016



DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto deve essere installato mediante cementazione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018