Datasheet


Flower Box Orchidea Maxi Product code 950

Rev. 2 of 04/08/2023







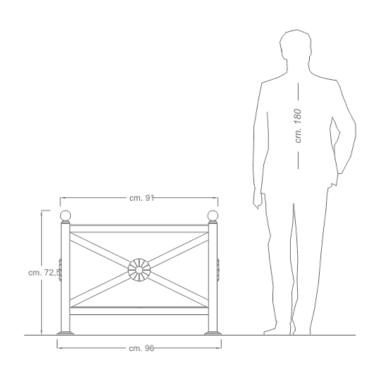

Dimost reserves the right to make at any time changes on the products deemed useful to improve the quality of the same; the impage contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Flower Box Orchidea Maxi Product code 950

Rev. 2 of 04/08/2023



DESCRIPTION

Structure

Square shape, composed of 4 columns in square tube of galvanized steel mm. 50x50x1.5, with decorative element at the top; each single column is provided with a plate at the base in galvanized steel. Connecting crosspieces and internal crosspieces in square tube of galvanized steel mm. 40x40x1.5; the crosspieces are adorned on the outside by a central decorative element. Internal tank made of galvanized sheet metal.

Overall weight: 45Kg

Rev. 2 of 04/08/2023



COLOR FINISH AS PROVIDED IN THE CATALOG





Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS

Product code 950-S-200 - Connection seat cm. 200 with backrest (for Orchidea composition)

Product code 950-S-150 - Connection seat cm. 150 with backrest (for Orchidea composition)

PRODUCT VARIANTS



Product code 950-BIS - Flower Box Orchidea Midi



Product code 950-BIS-R - Flower Box Orchidea Midi with perforated sheet panels



Product code 950-R - Flower Box Orchidea Maxi with perforated sheet panels

imcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items

<u>ر</u>

Datasheet

Flower Box Orchidea Maxi Product code 950

Rev. 2 of 04/08/2023



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Flower Box Orchidea Maxi Product code 950

Rev. 2 of 04/08/2023



D	ᆮ	 ı١		ᆮ	D	١
$\boldsymbol{\nu}$	ᆮ	ı١	v	ᆮ	n	. 1

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product does not require anchoring to the ground.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center

2/2