


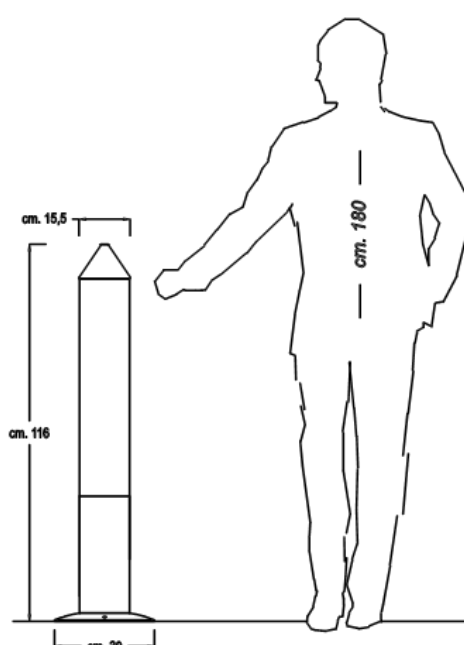

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DESCRIPTION

Structure

Upper shaft made of round galvanized steel tube Ø 152x3 mm provided inside with a round galvanized steel tube Ø 30x1.5 shaped in such a way as to facilitate the extinguishing of cigarette butts when they fall into the internal container. Upper part made of a truncated cone made of galvanized sheet metal, thickness mm. 1.2 with a Ø 20 mm cut-proof edged hole for the introduction of cigarette butts. Lower shaft made of round galvanized steel tube Ø 152x3 mm provided with an opening door for access to the internal container.

- The door is equipped with a lock with a single key. Cylindrical internal container made of galvanized steel. Circular base plate in galvanized sheet metal, thickness mm. 4, provided with holes for fixing to the ground.

Overall weight: 15Kg

Datasheet

Ashtray Fum-Off

Product code 375

Rev. 0 of 10/06/2016



FINISH ACCORDING TO THE CATALOGUE



RAL 1034
(Lower stem)



Gun metal gray
(Upper cone trunk and inner container)



RAL 9016
(Upper stem)

Customers can request a different finish from the RAL color options available on our website.

TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto è predisposto per il fissaggio al suolo mediante tirafondi e tasselli ad espansione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018