


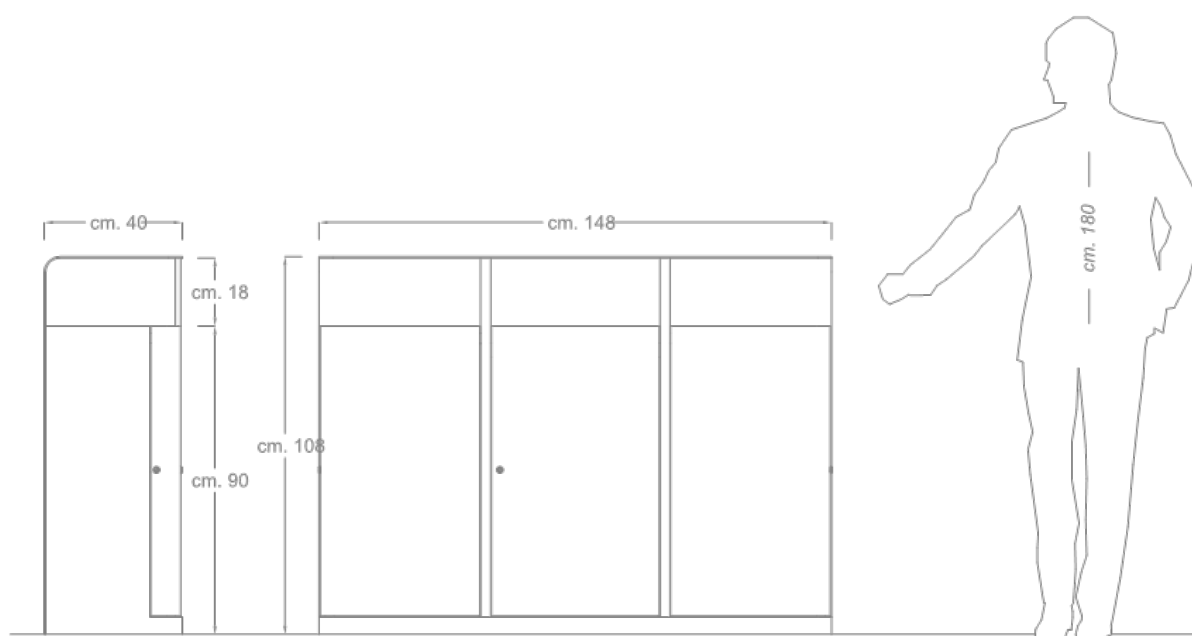

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Large trash bin Geo

Product code 440

Rev. 2 of 20/06/2018



DESCRIPTION

Structure

The Cestone Geo is characterized by its rectangular shape with rounded edges, consisting of a fixed shaped lid, made of 3 mm thick galvanized sheet metal; the module is divided into 3 compartments, separated by galvanized steel sheet panels. Each compartment is equipped with a special fixed bag holder ring. The 3 front doors made of 2 mm thick galvanized sheet metal, are equipped with stiffening edges, single key lock and indication (Italian/English) of the type of collection.

- Shaped base made of 2 mm thick galvanized sheet metal equipped with holes for draining rainwater and for fixing the structure to the ground.

Overall weight: 135Kg

Datasheet

Large trash bin Geo

Product code 440

Rev. 2 of 20/06/2018



FINISH ACCORDING TO THE CATALOGUE



RAL 6029
(Door collection "Glass")



RAL 9016
(Supporting structure)



RAL 5017
(Door collection "Aluminum")



RAL 1018
(Door collection "Plastic")

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS



Product code 431 - Ashtray Bond

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Large trash bin Geo

Product code 440

Rev. 2 of 20/06/2018



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

2/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Large trash bin Geo

Product code 440

Rev. 2 of 20/06/2018



DELIVERY

Prodotto fornito già assemblato con viteria in acciaio ed istruzioni per il fissaggio.

FIXING

Il prodotto è predisposto per il fissaggio al suolo mediante tirafondi e tasselli ad espansione.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018