

Rev. 0 of 22/10/2024





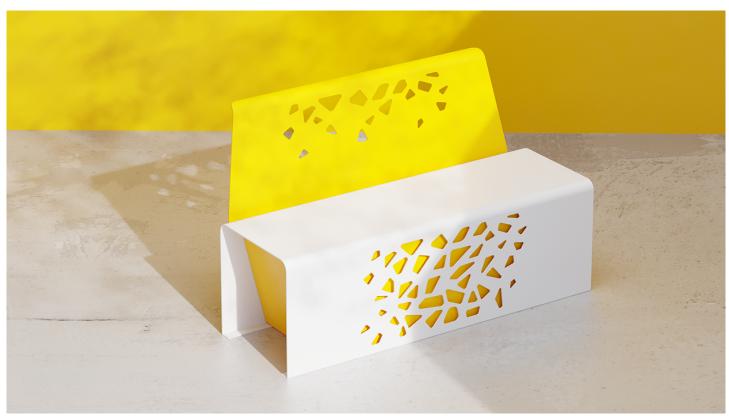

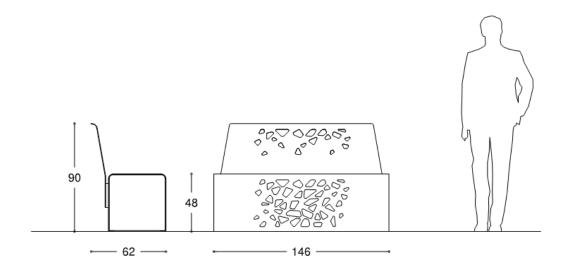

## Datasheet

Komete bench Product code D819-BIS

Rev. 0 of 22/10/2024



**DESCRIPTION** 

#### Structure

Seat block consisting of a single support made of 4 mm thick galvanized sheet metal obtained by laser cutting, and characterized on the front side by stylised decorative carvings.

Side panels inside the seat, made of 2 mm thick galvanized sheet metal obtained by laser cutting.

Backrest consisting of a shaped panel, made of 4 mm thick galvanized sheet metal, obtained by laser cutting with stylised carvings on the upper part, and equipped with a system for fixing to the seat block.

Overall weight: 147Kg

D.

Rev. 0 of 22/10/2024



#### **COLOR FINISH AS PROVIDED IN THE CATALOG**



RAL 9010 (External structure)



RAL 1018 (internal structure - backrest)

Customers can request a different finish from the RAL color options available on our website.

**PRODUCT VARIANTS** 



Product code D819 - Komete seat

## Datasheet

Komete bench Product code D819-BIS

Rev. 0 of 22/10/2024



#### ANTICORROSIVE TREATMENTS AND FINISHES

#### Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

### Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

### **Anti-corrosive application**

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

#### **Anticorrosive polymerization**

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

### Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

## Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

## Datasheet

# Komete bench Product code D819-BIS

Rev. 0 of 22/10/2024



DELI	VE	RY
------	----	----

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

**FIXING** 

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

**CORPORATE CERTIFICATIONS** 

#### ISO 9001:2015

Quality management system.

#### UNI EN ISO 3834-3:2021

Welding quality management system.

## **Processing center**

Certificate of Processing Center

2