

Datasheet


Komete litter bin with lid and ashtray

Product code D822-BIS

Rev. 0 of 10/02/2023



1/5

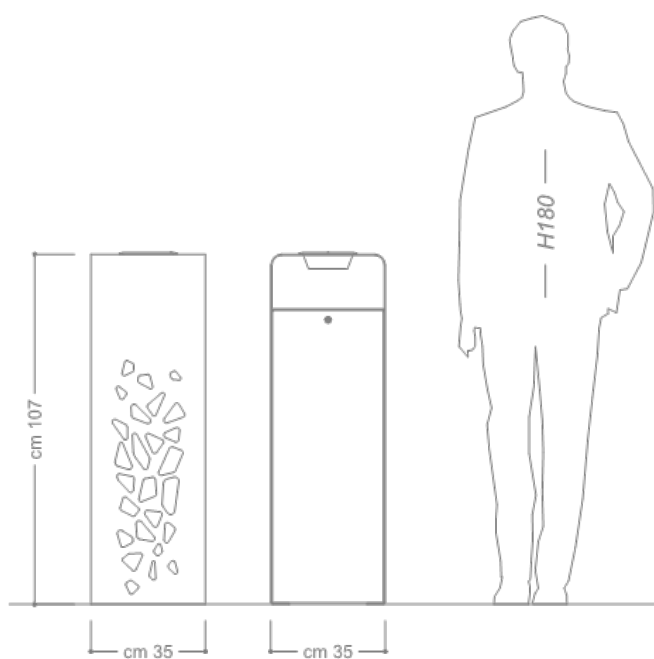

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Komete litter bin with lid and ashtray

Product code D822-BIS

Rev. 0 of 10/02/2023



DESCRIPTION

Structure

Komete model urban waste collection bin with lid and ashtray. Linear structure with rounded edges, made of 4 mm thick galvanized sheet metal, the side part is characterized by stylised decorative carvings, obtained by cutting with laser technology. The support is equipped in the upper part with a shaped opening for the introduction of waste.

- Front door, made of galvanized sheet metal, equipped with a single key lock, to allow the front tilting opening and the extraction of the internal bag, and equipped inside with a bag-holder profile.
- Internal and rear panelling of the bin made of galvanized sheet metal.
- Inside the bin is equipped with holes for fixing to the ground.
- Ashtray for extinguishing cigarettes; complete with micro-perforated plate in polished AISI 304 stainless steel sheet, 1 mm thick; emptying takes place using a special lever, located in the lower part, which allows the contents to be removed directly into the bag placed underneath.

Overall weight: 32Kg

Datasheet

Komete litter bin with lid and ashtray

Product code D822-BIS

Rev. 0 of 10/02/2023



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 9010
(External shell)



RAL 4005
(Inner shell)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



[Product code D822 - Komete litter bin](#)

Datasheet

Komete litter bin with lid and ashtray

Product code D822-BIS

Rev. 0 of 10/02/2023



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Komete litter bin with lid and ashtray

Product code D822-BIS

Rev. 0 of 10/02/2023



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center