
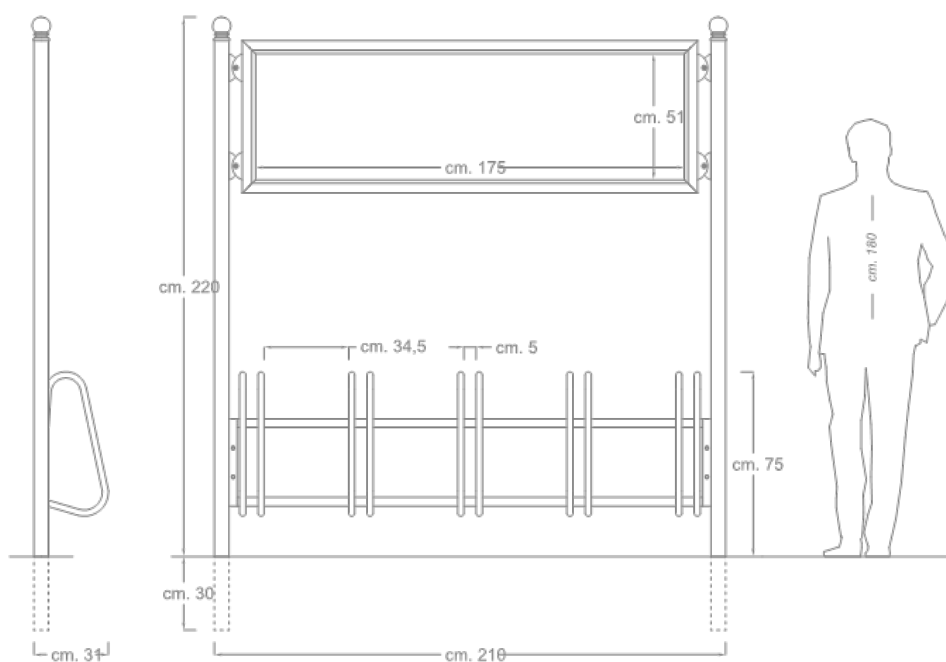


# Datasheet

Bicycle stands Liberty Display

Product code 286-D

Rev. 0 of 10/06/2016

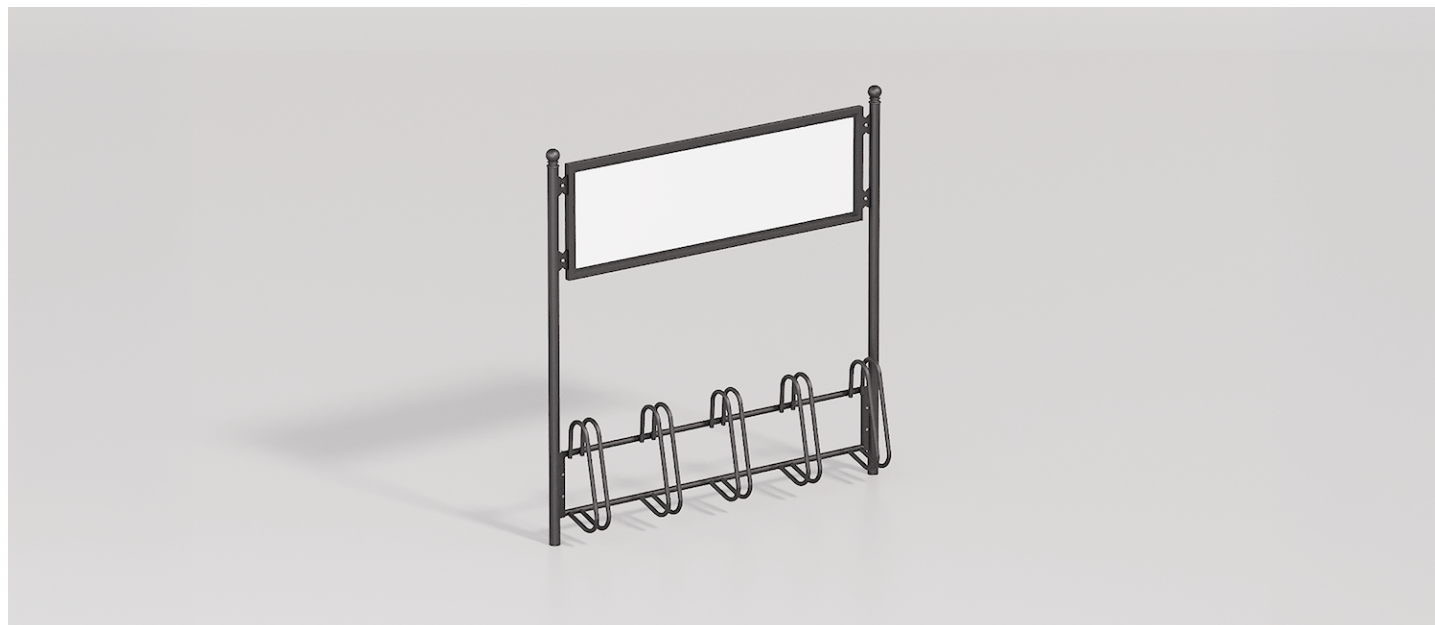

# Datasheet

Bicycle stands Liberty Display

Product code 286-D

Rev. 0 of 10/06/2016



## DESCRIPTION

### Structure

Liberty bike rack for 5 places composed of 2 support uprights in round tube of galvanized steel Ø mm. 60x2 adorned in the upper part with decorative friezes. 2 horizontal connecting crosspieces in round tube of galvanized steel Ø mm. 35x1.5; 5 bike-holding brackets in round tube of galvanized steel Ø mm. 25x1.5.

**Total weight:** 48Kg

# Datasheet

Bicycle stands Liberty Display

Product code 286-D

Rev. 0 of 10/06/2016



---

## FINISH ACCORDING TO THE CATALOGUE



Gun metal gray  
( Steel parts )

Customers can request a different finish from the RAL color options available on our website.

---

## PRODUCT OPTIONALS

Product code 286-D-AD -

---

## PRODUCT VARIANTS



Product code 286 - Bicycle stands Liberty

# Datasheet

Bicycle stands Liberty Display

Product code 286-D

Rev. 0 of 10/06/2016



## TREATMENTS AND FINISHES THAT PREVENT CORROSION

### Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

### Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

### Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

### Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

### Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

### Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

3/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

# Datasheet

Bicycle stands Liberty Display

Product code 286-D

Rev. 0 of 10/06/2016



---

## DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

---

## FIXING

Il prodotto deve essere installato mediante cementazione.

---

## CORPORATE CERTIFICATES

### ISO 9001:2015

Quality Management System.

### UNI EN ISO 3834-3:2021

Welding quality management system.

### Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018