


Datasheet

Linea 46 bus time schedule ø cm. 6 or ø cm. 9

Product code 378

Rev. 0 of 10/06/2016

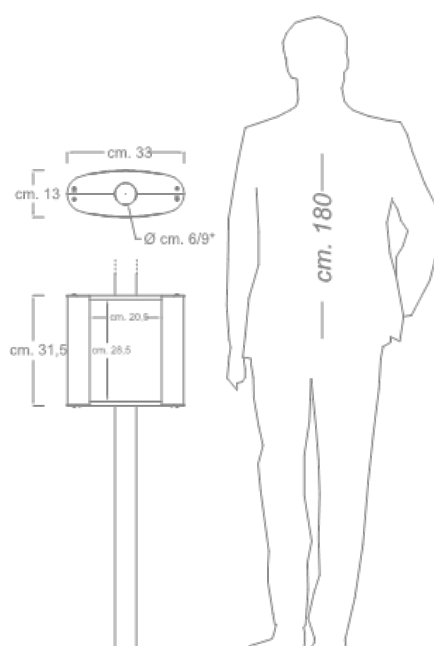

Datasheet

Linea 46 bus time schedule ø cm. 6 or ø cm. 9

Product code 378

Rev. 0 of 10/06/2016



DESCRIPTION

Structure

Double-sided ellipsoidal timetable, made of 1 mm thick galvanized steel box with rounded external corners and 3 mm thick galvanized sheet metal closing ends obtained from high definition laser cutting.

- The table is made up of two halves designed to internally house a circular section upright with a diameter of 60 mm or 90 mm or with a diameter on request*. *the customer will be responsible for specifying the dimensions of the upright already at the request stage.
- No. 2 opposing spaces designed to house both any timesheets (in A4 format) and the respective transparent PETG panels with a thickness of 1.5 mm; these panels will protect the information and prevent accidental or unauthorized removal.

Overall weight: 6Kg

Datasheet

Linea 46 bus time schedule ø cm. 6 or ø cm. 9

Product code 378

Rev. 0 of 10/06/2016



COLOR FINISH AS PROVIDED IN THE CATALOG



Brilliant aluminum
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

Datasheet

Linea 46 bus time schedule ø cm. 6 or ø cm. 9

Product code 378

Rev. 0 of 10/06/2016



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Linea 46 bus time schedule ø cm. 6 or ø cm. 9

Product code 378

Rev. 0 of 10/06/2016



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product has a slotted rear bracket for attachment to the existing pole.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center