


Datasheet

Large Trash Bin Oblo

Product code 361

Rev. 0 of 10/06/2017

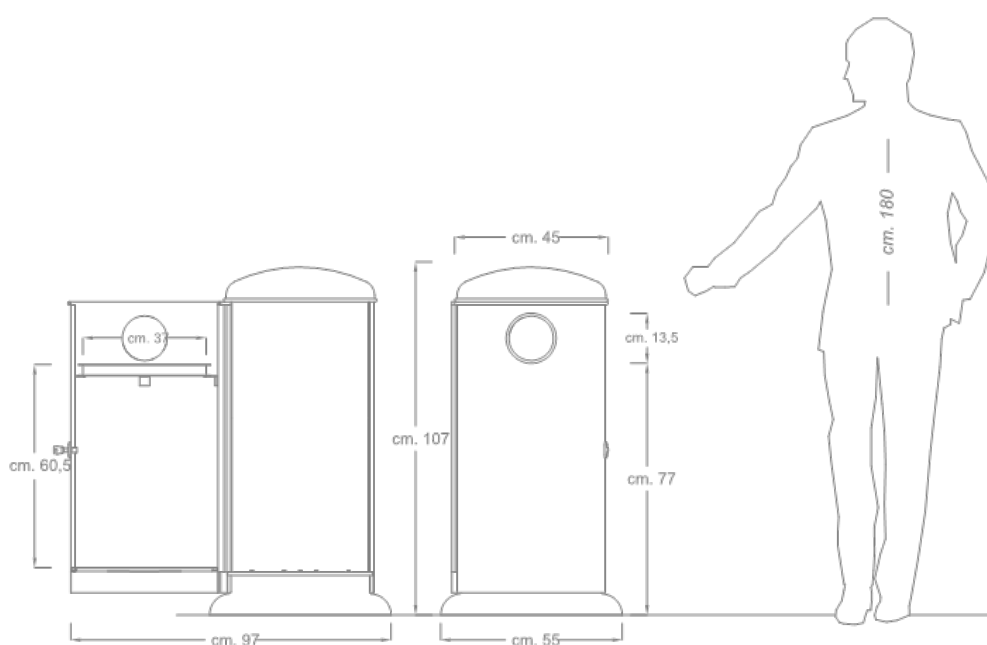

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

Datasheet

Large Trash Bin Oblo

Product code 361

Rev. 0 of 10/06/2017



DESCRIPTION

Structure

The Oblo bin is characterised by its cylindrical shape; it is made of 1.2 mm thick galvanised sheet metal. Lateral "book" opening, using a hinge that allows the rotation of half the structure. The opening section is equipped with: a bag-holding ring in galvanised steel and a single key lock. For the introduction of waste, the opening section is equipped with a circular hole, with an anti-cut edge.

- Shaped lid, fixed type, made of 2 mm thick galvanised sheet metal, with an anti-cut edge at the end.
- The base of the bin is in white concrete, stone effect.

Overall weight: 66Kg

Datasheet

Large Trash Bin Oblo

Product code 361


Rev. 0 of 10/06/2017



FINISH ACCORDING TO THE CATALOGUE



Gun metal gray
(Fixed metal part)



RAL 3003
(Door)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT OPTIONALS



Product code 431 - Ashtray Bond

Datasheet

Large Trash Bin Oblo

Product code 361

Rev. 0 of 10/06/2017



TREATMENTS AND FINISHES THAT PREVENT CORROSION

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

2/5

Dimcar si riserva di apportare, in qualsiasi momento, modifiche sui prodotti ritenute utili al miglioramento qualitativo degli stessi; le immagini contenute nelle schede potrebbero non riprodurre fedelmente i colori reali degli articoli.

DELIVERY

Prodotto fornito in kit di assemblaggio con viteria in acciaio ed istruzioni per il montaggio e fissaggio.

FIXING

Il prodotto non necessita di ancoraggio al suolo.

CORPORATE CERTIFICATES

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018